2/PRTS
09/403174
Rec'd PCT/PTO 18 OCT 1999

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application No. :

U.S. National Serial No. :

Filed :

PCT International Application No. : PCT/EP99/01091

VERIFICATION OF A TRANSLATION

I, the below named translator, hereby declare that:

My name and post office address are as stated below;

That I am knowledgeable in the German language in which the below identified international application was filed, and that, to the best of my knowledge and belief, the English translation of the international application No. PCT/EP99/01091 is a true and complete translation of the above identified international application as filed.

I hereby declare that all the statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the patent application issued thereon.

Date: August 9, 1999

Full name of the translator : Derek Ernest LIGHT
For and on behalf of RWS Group plc

Post Office Address : Europa House, Marsham Way,
Gerrards Cross, Buckinghamshire,
England.

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 :		(11) International Publication Number:	WO 97/11790
B07C 3/14, 3/00	A1	(43) International Publication Date:	3 April 1997 (03.04.97)

(21) International Application Number: PCT/US96/15218

(22) International Filing Date: 20 September 1996 (20.09.96)

(30) Priority Data:
08/536,865 29 September 1995 (29.09.95) US

(71) Applicant: UNITED PARCEL SERVICE OF AMERICA, INC. [US/US]; 55 Glenlake Parkway, N.E., Atlanta, GA 30328 (US).

(72) Inventors: BJORNER, Johannes, A., S.; 7 Tamarack Lane, Woodbury, CT 06798 (US). MOED, Michael, C.; 520 Steeple Run, Roswell, GA 30075 (US).

(74) Agents: BARNHARDT, Hubert, J., III et al.; Jones & Askew, 37th floor, 191 Peachtree Street, N.E., Atlanta, GA 30303-1769 (US).

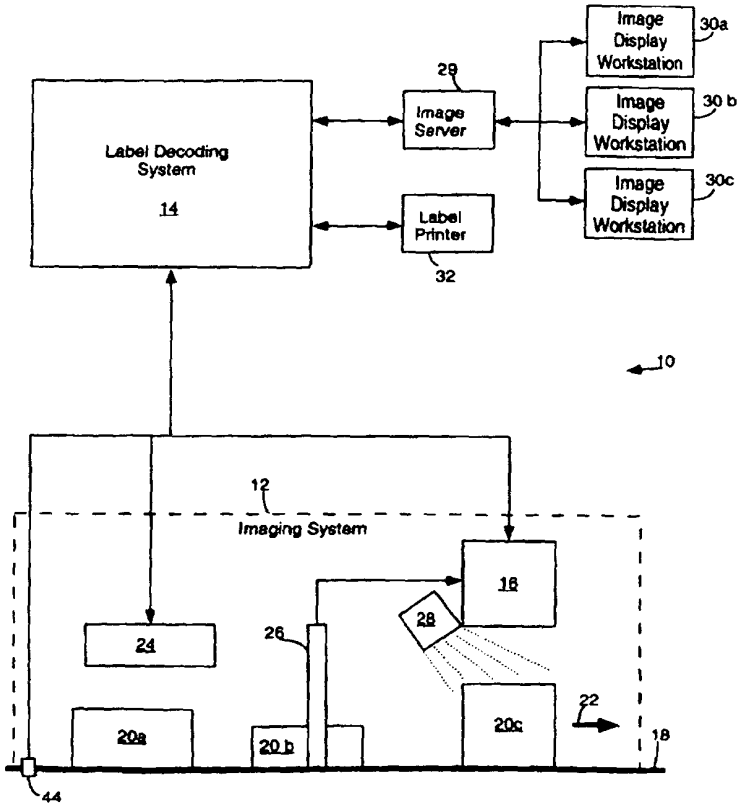
(81) Designated States: CA, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: SYSTEM AND METHOD FOR READING PACKAGE INFORMATION

(57) Abstract

A system (10) for reading package information includes an imaging system (12) and a label decoding system (14). The imaging system (12) captures an image of a package surface (34) that includes a machine readable code such as a bar code (36) and an alphanumeric destination address (38). The label decoding system (14) locates and decodes the machine readable code and uses OCR techniques to read the destination address (38). The destination address is validated by comparing the decoded address to a database of valid addresses. If the decoded address is invalid, an image of the destination address is displayed on a workstation (30) and an operator enters the correct address. The system (10) forms a unified package record by combining the decoded bar code data and the correct destination address data. The unified package record is used for subsequently sorting and tracking the package (20) and is stored in a database and applied to a label that is affixed to the package (20).



FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	**GB**	United Kingdom	**MW**	Malawi
AT	Austria	**GE**	Georgia	**MX**	Mexico
AU	Australia	**GN**	Guinea	**NE**	Niger
BB	Barbados	**GR**	Greece	**NL**	Netherlands
BE	Belgium	**HU**	Hungary	**NO**	Norway
BF	Burkina Faso	**IE**	Ireland	**NZ**	New Zealand
BG	Bulgaria	**IT**	Italy	**PL**	Poland
BJ	Benin	**JP**	Japan	**PT**	Portugal
BR	Brazil	**KE**	Kenya	**RO**	Romania
BY	Belarus	**KG**	Kyrgystan	**RU**	Russian Federation
CA	Canada	**KP**	Democratic People's Republic of Korea	**SD**	Sudan
CF	Central African Republic			**SE**	Sweden
CG	Congo	**KR**	Republic of Korea	**SG**	Singapore
CH	Switzerland	**KZ**	Kazakhstan	**SI**	Slovenia
CI	Côte d'Ivoire	**LI**	Liechtenstein	**SK**	Slovakia
CM	Cameroon	**LK**	Sri Lanka	**SN**	Senegal
CN	China	**LR**	Liberia	**SZ**	Swaziland
CS	Czechoslovakia	**LT**	Lithuania	**TD**	Chad
CZ	Czech Republic	**LU**	Luxembourg	**TG**	Togo
DE	Germany	**LV**	Latvia	**TJ**	Tajikistan
DK	Denmark	**MC**	Monaco	**TT**	Trinidad and Tobago
EE	Estonia	**MD**	Republic of Moldova	**UA**	Ukraine
ES	Spain	**MG**	Madagascar	**UG**	Uganda
FI	Finland	**ML**	Mali	**US**	United States of America
FR	France	**MN**	Mongolia	**UZ**	Uzbekistan
GA	Gabon	**MR**	Mauritania	**VN**	Viet Nam

BNSDOCID: <WO 9711790A1>

"SYSTEM AND METHOD FOR READING PACKAGE INFORMATION"

Technical Field

The present invention relates to package tracking systems, and more particularly relates to systems for automatically reading and decoding package information such as machine readable codes and alphanumeric destination information.

Background of the Invention

Small package delivery companies such as the assignee of the present invention may handle as many as several million packages each day. In order to improve the efficiency and accuracy with which this volume of packages is handled, these companies increasingly rely on automated package sorting and routing facilities. Small package delivery companies also desire to obtain package related information in order to better manage their operations and to provide a variety of shipping related information to their customers.

The process of sorting and tracking packages as they proceed through a package transportation system requires that each package bear two types of information. First, each package must provide a destination address. Second, each package must include a tracking number that uniquely identifies it from other packages in the system.

The destination address is required in order for the package delivery company to know where the package is going. The destination address, which includes alphanumeric text, is typically written on the package or printed on a label that is affixed to the package. For addresses in the United States, the destination address includes a street address, city, state and zip code.

The tracking number, which consists of a series of alphanumeric characters, uniquely identifies each package in the package transportation

BNSDOCID: <WO 9711790A1>

system. In most cases, the tracking number is affixed to the package in the form of a machine readable code or symbol such as a bar code. The machine readable code is read by electronic code readers at various points in the transportation system. This allows the package delivery company to monitor the movement of each package through its system and to provide customers with information pertaining to the status and location of each package.

The importance of collecting package related data has led to the development of a variety of devices for reading bar codes and other machine readable codes. These devices include hand held readers used by employees when they pick up or deliver packages, and over-the-belt cameras that are mounted over conveyor belts in order to read machine readable codes as the packages move through the delivery company's terminal facilities.

In some cases, shippers may also print and affix labels including two-dimensional machine readable codes that include both package identification information and destination address information. These dense codes are read by over-the-belt cameras and the information is used to track and sort the package. However, for packages that enter the delivery company's system without such labels, there is no efficient, automatic way to prepare such labels and affix them to packages.

Optical character recognition (OCR) technology has also improved to the point where it is feasible to automatically read and decode printed destination address data. The assignee of the present invention has developed over-the-belt camera systems that can be used to capture and decode bar codes and text as packages travel beneath the camera on a conveyor belt. The ability to read and decode destination address data is useful because it facilitates automatic sorting and routing of packages in the delivery system.

Although OCR systems are becoming more common, there are often difficulties associated with decoding data from packages moving on a conveyor belt at a high rate of speed. Current bar code decoding techniques provide for using a variety of algorithms for scanning an image and locating and decoding a bar code. These techniques are very accurate, in part because of the use of checksums and other techniques to ensure the reliability of the bar code decoding process. OCR techniques typically apply a variety of decode algorithms to a string of text in order to accurately decode the text. However, there remains the possibility that the address data may be improperly decoded. Furthermore, it is difficult to detect an improperly decoded address because

OCR decoding does not employ checksums and other techniques that are available to verify the accuracy of machine readable codes.

Therefore, there is a need in the art for a system that reads and decodes bar codes and text, and which verifies the accuracy of the destination address data. Furthermore, there is a need for a system that provides a method for correcting improperly decoded destination address data, and for combining the destination address data and the decoded bar code data to form a unified package record, which may be used to track and sort the package as it moves through the package delivery system.

Summary of the Invention

The invention seeks to provide a system that reads and decodes all relevant package data from a package, that verifies the accuracy of the decoded package data, that facilitates the correction of incorrectly decoded package data, and that provides a unified package record including relevant package data.

In accordance with the invention, this object is accomplished in a method for reading package information from a package that includes first and second information indicia. The method includes capturing an image of the package, including the first and second information indicia. The first information indicia is located and decoded to provide first package data. The second information indicia is located and decoded to provide second package data. The first and second package data are then combined to form a unified package record. The unified package record may be stored in a database or printed on a label and affixed to the package.

The invention further provides a method for reading and verifying package information from a package. The method includes capturing an image of the package, which includes information indicia. The information indicia is located and decoded to provide first package data. The first package data is verified to determine whether it is valid. If not, the image of the information indicia is displayed on a workstation. Manually entered first package data is then received from an operator at the workstation.

A system and method for reading package information formed in accordance with the invention has a number of advantages. A package bears at least one label that includes information indicia such as a destination address and a machine readable symbol (for example, a bar code or two-dimensional dense

code) bearing a package identification number. As packages move along a conveyor belt, an image of each package is captured and the indicia are decoded. The decoded destination address is validated by checking a database of valid addresses. If the decoded address is invalid, an image of the address is displayed on an image display workstation, and an operator enters the correct destination address. The symbol data and destination address are combined to form a unified package record, which may be used to sort and track the package. The unified package record may be stored in a database or printed on a label and affixed to the package.

Brief Description of the Drawings

Fig. 1 is a block diagram of a system for reading package information in accordance with the present invention.

Fig. 2 is a diagram of a parcel including a fluorescent ink fiduciary mark located within the destination address block of the parcel.

Fig. 3 is a flow diagram of the process for reading package information carried out by the system of Fig. 1.

Fig. 4 is a flow diagram of the preferred method for processing image data provided by the imaging system that forms a part of the system of Fig. 1.

Fig. 5 is a flow diagram of the preferred method for correcting incorrectly decoded destination address data.

Detailed Description of the Preferred Embodiment

The present invention provides a novel system and method for reading package information. Generally described, the system includes an imaging system that provides a digital image of a surface of a package that is moving on a conveyor belt. The image includes a bar code and destination address that are provided on the package surface. A label decoding system processes the image from the imaging system and decodes the bar code and the destination address data. The destination address data is validated by checking the address against the United States Postal Service's ZIP+4 database, which contains all of the valid addresses in the United States. If the destination address was decoded incorrectly, the portion of the image that includes the destination address is displayed on an image display workstation, along with a list of possible addresses from the database. An operator reads the destination

address data from the display and manually enters it into the computer terminal or selects the correct address from a displayed list of possible addresses. After the destination address has been validated or manually entered, the bar code data and destination address data are combined to form a unified package record, which provides efficient means for automatically tracking and sorting packages. This data may be stored in a database or printed on labels and affixed to the package.

Before describing the present invention in additional detail, it is useful to discuss the nomenclature of the specification. Portions of the detailed description that follows are represented largely in terms of processes and symbolic representations of operations performed by computer components, including a central processing unit (CPU), memory storage devices for the CPU, and connected display devices. These operations include the manipulation of data by the CPU and the maintenance of these data within data structures resident in one or more of the memory storage devices. The symbolic representations are the means used by those skilled in the art of computer programming and computer construction to most effectively convey teachings and discoveries to others skilled in the art.

For the purposes of this discussion, a process or portions thereof may be generally conceived to be a sequence of computer-executed steps leading to a desired result. These steps generally require physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical, magnetic, or optical signals capable of being stored, transferred, combined, compared, or otherwise manipulated. It is conventional for those skilled in the art to refer to these signals as bits, values, elements, symbols, characters, terms, objects, numbers, records, files or the like. It should be kept in mind, however, that these and similar terms should be associated with appropriate physical quantities for computer operations, and that these terms are merely conventional labels applied to physical quantities that exist within and during operation of the computer.

It should also be understood that manipulations within the computer are often referred to in terms such as adding, comparing, moving, etc. which are often associated with manual operations performed by a human operator. In most cases, it will be apparent that these steps are performed by a computer without requiring input from an operator. In some cases, the operations described herein are machine operations performed in conjunction

with a human operator that interacts with the computer. The machines used for performing the operation of the present invention include general purpose digital computers or other similar computing devices.

In addition, it should be understood that no particular programming language is provided, and that the programs, processes, methods, etc. described herein are not limited to any particular computer or apparatus. Those skilled in the art will appreciate that there are many computers and operating systems which may be used in practicing the instant invention and therefore no detailed computer program could be provided which would be applicable to these many different systems. Each user of a particular computer or operating system will be aware of the program modules and tools that are most appropriate for that user's needs and purposes.

Referring now the drawings, in which like numerals represent like elements throughout the several figures, the present invention will be described.

The System for Reading Package Information

Fig. 1 illustrates a system **10** for reading and decoding package information as packages travel on a conveyor belt. The system **10** includes an imaging system **12** and a label decoding system **14**. Generally described, the preferred imaging system **12** is a two-camera system that includes a high resolution over-the-belt (OTB) camera **16** and a fiduciary mark detector **24**, which includes the second camera. The high resolution OTB camera **16** and fiduciary mark detector **24** are mounted above a conveyor belt **18** that carries packages **20**a-c in the direction of arrow **22**. Together, the high resolution OTB camera **16** and fiduciary mark detector **24** ascertain the position and orientation of a fluorescent ink fiduciary mark located within a destination address block on the surface of a package, capture an image of the top surface of the package, and provide the image and the location and orientation of the fiduciary mark to the label decoding system **14**. The label decoding system **14** includes general purpose and high performance computers and data storage facilities. The label decoding system **14** is connected to an image server **29**, which is connected to at least one image display workstation **30**a-c, and to a label printer **32**. The label decoding system **14** locates and decodes machine readable package identification data (e.g., a bar code) and destination address data contained in the image. This package identification data and destination

address data are combined to form a unified package record, which may be stored in a database or printed in machine readable form on a label and affixed to the package.

Fig. 2 illustrates the top surface **34** of a package **20** that is processed by the preferred system **10**. The top surface **34** of each package **20** includes package tracking information in the form of a machine readable code or symbol such as a bar code **36**. The package tracking information represented by the bar code uniquely identifies the package and distinguishes it from the other packages in the delivery system. The top surface of the package also includes a destination address **38**, which typically consists of alphanumeric text arranged in two or more lines. The destination address **38** is located in an area referred to as the destination address block **40**. A fiduciary mark such as fluorescent ink fiduciary mark **42** is located approximately in the center of the destination address block **40** in the same area as the text defining the destination address. The fiduciary mark **42** is applied to the destination address block **40** by the shipper or by an agent of the small package delivery company. This may be accomplished by using a rubber stamp in the shape of the desired fiduciary mark to apply fluorescent ink to the package surface. Those skilled in the art will appreciate that other types of fiduciary marks may be used.

Referring again to Fig. 1, the components and operation of the imaging system **12** and the label decoding system **14** will be described in additional detail. In addition to the high resolution OTB camera **16** and fiduciary mark detector **24**, the imaging system **12** includes a package height sensor **26**, and an illumination source **28**. As packages are transported by the conveyor belt **18** the packages **20**a-c first pass under the fiduciary mark detector **24**, which detects a fiduciary mark in order to determine the location and orientation of the destination address block. The package height sensor **26** is a commercially available light curtain, and is used to determined the height of the package before it passes beneath the high resolution OTB camera **16**. The height information from the height sensor **26** is used by the high resolution camera's focusing system. This permits the high resolution camera **16** to accurately focus on the top surface of the package **20**c as it moves beneath the camera. The illumination source **28** illuminates the top surface of the package **20**c as it passes beneath the high resolution camera **16**. The location and orientation information are provided to the label decoding system **14** along with the image from the high resolution camera **16**.

The conveyor belt system is used to transport packages through a terminal facility. In the preferred system **10**, the conveyor belt **18** is 16 inches wide and carries up to 3,600 packages per hour while moving at a rate of up to 100 feet per minute. The packages **20**a-c vary in height and may be arbitrarily oriented on the conveyor belt **18**. The conveyor belt **18** moves each package beneath the fiduciary mark detector **24** and high resolution camera **16** in single file, and with some amount of space between them. The packages are separated by a device known as a singulator. A suitable singulator is described in U.S. Patent No. 5,372,238 to *Bonnet*, entitled "Method and Apparatus for Singularizing Objects."

The conveyor belt **18** includes a belt encoder **44** that is used to determine the speed and position the associated conveyor belt. Those skilled in the art will appreciate that the speed and position of the conveyor are needed in order to synchronize the position of the fiduciary mark, the package height information, and the position of the package as it passes beneath the high resolution camera **16**. The belt encoder supplies a signal indicating the speed of the conveyor **18** to the fiduciary mark detector **24** and the high resolution camera **16**. The signal from the encoder is used to produce a line clock signal that is used to trigger cycles of the fiduciary mark detector's low resolution camera (i.e., exposures of the line of CCD pixels comprising the low resolution camera). Each cycle captures a row of the image of the surface of a parcel as it moves past the fiduciary mark detector **24**. The belt encoder **44** is selected to provide a pulse for each cycle of the high resolution camera **16**. Those skilled in the art will appreciate that the signal from the encoder allows the line images captured by the fiduciary mark detector **24** and high resolution camera **16** to be assembled by the label decoding system **14** into two-dimensional images with the correct aspect ratios. A more detailed description of the interaction between an OTB camera, conveyor belt, height information processor, and belt encoder is provided in U.S. Patent No. 5,291,564 to *Shah*, entitled "System and Method for Acquiring an Optical Target," which is incorporated herein by reference.

A suitable fiduciary mark detector is described in pending U.S. Application No. 08/419,176, filed April 10, 1995, and entitled "Method for Locating the Position and Orientation of a Fiduciary Mark," which is assigned to the assignee of the present invention and is incorporated herein by reference. The fiduciary mark detector **24** includes a low resolution CCD camera, a video

processor, and an ultraviolet light source for illuminating the fluorescent ink that forms the fiduciary mark. The conveyor belt **18** moves a package **20**a through the field of view of the low resolution CCD camera. The video processor controls the operation of the low resolution camera and sequentially transmits a one-bit (i.e., black/white) video signal corresponding to the image captured by the low resolution camera to the label decoding system **14**. The preferred low resolution camera is a low resolution, monochrome, 256 pixel line-scan type camera such as a Thompson TH7806A or TH7931D. The ultraviolet light source illuminates the package **20**a as it is conveyed through the viewing area of the low resolution camera, which captures an image of the surface of the package **20**a. The low resolution camera is fitted with a commercially available optical filter that transmits yellow/green light such as that emitted by fluorescent ink exposed to ultraviolet light and attenuates light in other portions of the visible spectrum. The low resolution camera is thus configured to be responsive to the yellow/green light emitted by the illuminated fiduciary mark, and not to the other indicia found on the package surface. More specifically, the optical filter causes the low resolution camera to be responsive to the yellow/green light emitted from the commercially available National Ink No. 35-48-J (Fluorescent Yellow) in response to ultraviolet light.

Referring again to Fig. 2, the preferred fiduciary mark **42** will be described in additional detail. The preferred fiduciary mark **42** comprises two fluorescent non-overlapping circles of different diameter. As used herein, a circle means either an annulus or the area bounded by an annulus. The fiduciary mark **42** includes a large circle and a small circle oriented such that a vector from the center of large circle to the center of the small circle is oriented approximately in the same direction as underlying text of the destination address **38**. The position of the fiduciary mark **42** is defined to be the mid-point of the vector. It will be clear to those skilled in the art that alternative embodiments might include locating the fiduciary mark elsewhere on the parcel in a known relation to a text bearing area, or in a different known relationship to the underlying text. The fiduciary mark **42** is typically applied to a parcel using a conventional rubber stamp and fluorescent ink after the destination address **38** has been affixed to the parcel. It will be appreciated that the fiduciary mark **42** might be carried on a label, preprinted upon the parcel, or might be carried upon a transparent envelope into which an address label is placed.

3NSDOCID: <WO 9711790A1>

For the preferred fiduciary mark **42**, the diameter of the large circle is approximately 3/4 of an inch, the diameter of the small circle is approximately 7/16 of an inch, and the distance separating them is approximately 1/4 of an inch. It is noted that a limit is imposed upon the size of the fiduciary mark **42** by the resolution of the low resolution camera that forms a part of the fiduciary mark detector **24**. For example, the fiduciary mark **42** may be made smaller if the low resolution camera has a higher resolution, and the resolution of camera may be reduced if the fiduciary mark is made larger.

Those skilled in the art will appreciate that a fiduciary mark can be any mark that identifies the location of the destination address and that the preferred fiduciary mark comprising two circles is simply one of a variety of possible choices. Those skilled in the art will also appreciate that although the preferred fiduciary mark indicates the location and orientation of the destination address it is possible to use a fiduciary mark that indicates only location. In such a case, the orientation would be determined by applying an appropriate processing technique to the image of the destination address block.

The preferred system **10** also defines a region of interest defined with respect to the fiduciary mark **42**. The region of interest is defined in terms of the high resolution camera to be a 1k by 1k square (i.e., 1,024 pixels by 1,024 pixels, which is equivalent to approximately four inches by four inches) centered on the defined position of the fiduciary mark **42**. The label decoding system **14** determines the position and orientation of the fiduciary mark **42** and defines the region of interest with respect to the position of the fiduciary mark **42**. The label decoding system then creates and stores a high resolution text image within the region of interest from the data captured by the high resolution camera **16**. In this manner, only a relatively small portion of the data captured by the high resolution camera **16** is processed in order to decode the destination address data.

The package height sensor **26** is a commercially available light curtain, and is used to determined the height of the package before it passes beneath the high resolution OTB camera **16**. The height information from the height sensor **26** is used by the high resolution camera's focusing system.

The preferred illumination source **28** includes an unsymmetrical elliptical reflector. The reflector is shaped by first and second elliptical surfaces. The first and second elliptical surfaces share a common first focus, along which the light source is located. The first and second elliptical surfaces have different

second foci. Thus, half of the elliptical surface concentrates the light at one level and the other half concentrates the light at a second level. Together, the first and second elliptical surfaces develop intense illumination between their respective second focal axes.

The high resolution camera **16** is preferably a monochrome, 4,096 pixel line-scan type camera such as one using a Kodak KLI-5001 CCD chip. Each pixel measures approximately 7 microns x 7 microns. The CCD array is sufficiently wide to scan the entire width of the conveyor belt. The image of the package is captured one "slice" at a time as the package moves beneath the camera. The high resolution camera **16** transmits an eight-bit gray-scale video signal corresponding to the captured image to the label decoding system **14**. Illumination source **28** provides bright white light in order to illuminate the package as it is conveyed through the viewing area of the high resolution camera **16**, which captures an image of the surface of a package. The high resolution camera **16** is responsive to a gray-scale light pattern such as that reflected by black ink text on the surface of the package **20**c. The high resolution camera **16** is relatively unresponsive to light such as that reflected by fluorescent ink when illuminated by white light. More specifically, the commercially available National Ink No. 35-48-J (Fluorescent Yellow) is substantially invisible to the high resolution camera **16** when illuminated by the white light source **28**.

Suitable high resolution camera systems are described in U.S. Patent Nos. 5,327,171 to *Smith et al.*, entitled "Camera System Optics" ("the '171 patent"), and 5,308,960 to *Smith et al.*, entitled "Combined Camera System," and in allowed U.S. Application No. 08/292,400, filed August 18, 1994, entitled "Optical Path Equalizer" ("the Optical Path Equalizer application"), all of which are assigned to the assignee of the present invention and incorporated herein by reference.

The '171 patent describes an OTB camera system for capturing images of packages as they move beneath the camera on a conveyor belt. The system described in the '171 patent includes an illumination source, a belt encoder for determining the speed and position of the conveyor belt, and a processing subsystem that searches for a number of different acquisition targets.

The Optical Path Equalizer application describes an OTB camera with an optical system that equalizes the path between the OTB camera and the package located beneath the camera. This allows the camera to accurately focus

on the package surface regardless of the package's height, and also maintains an approximately constant image size regardless of the height of the package. The optics assembly includes a pair of movable mirrors and an array of fixed mirrors. The movable mirror are mounted on pivot pins and are rotated by one or more actuators. The array of fixed mirrors includes a plurality of mirrors positioned at increasing distances from the movable mirrors as to provide a plurality of different optical path lengths between the camera and the package surface. The Optical Path Equalizer application also describes the use of a height sensing device such as a commercially available light curtain. The data from the height sensing device is used to determine the optical path length of the variable optical subsystem.

The label decoding system **14** processes the data provided by the imaging system **12**. The label decoding system **14** includes input/output devices for receiving data from the fiduciary mark detector **24** and the high resolution camera **16**. The label decoding system includes both general purpose computers and high performance computers. The high performance computers, such as Adaptive Solutions CNAPS processor and Imaging Technologies 150/40 processor, are used to run that OCR algorithms that are used to decode the alphanumeric destination address data. The general purpose computers, such as Heurikon Nitro 60 and Heurikon HKV4D computers, are used to process the location and orientation data from the fiduciary mark detector **24** and to decode detect and decode the bar code that includes the package tracking information. The label decoding system includes storage devices such as memory, disk drives and tape drives. The label decoding system may also be connected to other computing equipment that is used for package tracking, billing, etc.

The label decoding system **14** is connected to a image server **29**, which is connected to a network that includes a plurality of image display workstations **30**a-c. If the label decoding system is unable to verify a decoded destination address by reference to the U.S. Postal Service's ZIP+4 database, the system **10** displays the destination address image on one of the image display workstations **30**a-c, where it is viewed by an operator. The displayed destination address image is accompanied by the closest addresses from the database. The operator than reads the address on the display and manually enters the correct address or selects the correct address from the list of the closest addresses. Thus, the image display workstation must include a display,

a processor, input means such as a keyboard, and input/output means for communication data to and from the label decoding system. The preferred image display workstations **30**a-c are IBM compatible personal computers based on Intel Corporation's PENTIUM processor and running Microsoft Corporation's WINDOWS NT operating system. Those skilled in the art will appreciate that the image display workstations may include any computer imaging system or other computer image processor capable of receiving and processing pixel images and other information at high rates of speed, and that the number of such image display workstations used in a facility will depend on the volume of packages moving through the system and various other factors. Those skilled in the art will also appreciate that the image server **29** may be any computer or network server capable of being connected to the image display workstations and capable of transferring and processing pixel images at high rates of speed.

The label decoding system is also connected to at least one label printer **32**. As mentioned briefly above, the decoded package identification information and destination address are combined to form a unified package record, which may be used to facilitate the track and sorting of the package throughout the delivery system. While the unified package record may be stored in a database, it may also be printed on a label and automatically affixed to the package as it travels on the conveyor belt. The preferred label printer **32** is an automatic label applicator, manufactured by Accusort. In the preferred system **10**, the unified package record is printed in machine readable dense code, such as the codes described in U.S. Patent Nos. 4,896,029 to *Chandler et al.*, entitled "Polygonal Information Encoding Article, Process and System" and 4,874,936 to *Chandler et al.*, entitled "Hexagonal, Information Encoding Article, Process and System." Those skilled in the art will appreciate that the number of label printers will depend on the configuration of the conveyor system, the number of packages moving through the system, and other factors.

The Preferred Method for
Reading Package Information

The preferred method for reading package information will now be discussed in conjunction with Figs. 3-5. As described above, the system **10** is operative for capturing an image of a package as it travels on a conveyor belt, and detecting and decoding a bar code and OCR address data that appear on the

package. The OCR data is validated and, if not accurate, is displayed on a terminal where an operator can manually enter the address data. The decoded bar code data and address data are combined to form a unified package record, which is subsequently used to sort and track the package.

Fig. 3 is a flow diagram illustrating the preferred method **300** for reading package information. The steps that form the method **300** are carried out by the various equipment that forms a part of the system **10** for reading package information. The method **300** begins at step **302** by determining the location and orientation of the destination address block. In the preferred system, this is accomplished as the package moves beneath the fiduciary mark detector **24**, which is described above in conjunction with Figs. 1 and 2. The coordinate and orientation information from the fiduciary mark detector are provided to the label decoding system **14**, where they are used to process the image that is provided by the high resolution camera **16**.

After the package is scanned by the fiduciary mark detector, the package height is determined by the package height sensor **26** at step **304**. At step **306** a high resolution image of the top of the package is captured by the high resolution OTB camera **16** as the package passes beneath the high resolution camera. This image is provided to the label decoding system **14**. The high resolution camera **16** uses the package height data from the package height sensor **26** to adjust the focal length of the camera and ensure that the camera is properly focused regardless of the height of the package.

At step **308** the label decoding system **14** processes the data from the belt encoder **44**, the fiduciary mark detector **24**, and the high resolution camera **16**. Generally described, the processing performed by the label decoding system includes locating and decoding the bar code, locating and decoding the destination address, verifying the accuracy of the destination address, and receiving a manually entered destination address if needed. The particular steps involved in processing the data are described below in conjunction with Fig. 4.

At step **310** the bar code and destination address data are combined to form a unified package record, which is stored in a database or printed on a label and affixed to the package at step **312**. The data contained in the unified package record is subsequently used for sorting and tracking the package as it moves through the delivery company's system. The method **300** terminates at step **314**.

Fig. 4 is a flow diagram illustrating the preferred method **308** for processing image data. This method is carried out by the label decoding system **14** and forms a part of the method **300** of Fig. 3. The method **308** begins at step **400** when the label decoding system receives the data from the belt encoder **44**, the fiduciary mark detector **24** and the high resolution OTB camera **16**. As described above, the high resolution camera provides an image of the top of a package. The image includes a bar code **36** and a destination address **38**. The fiduciary mark detector provides data indicating the location and orientation of the destination address block **40**.

At step **402** the label decoding system **14** locates and decodes the bar code **36** or other machine readable symbol, which is contained in the image provided by the high resolution camera **16**. Those skilled in the art will be familiar with various systems and methods for locating and decoding bar codes. Suitable methods for locating and decoding the bar code **36** are described in U.S. Patent Nos. 5,343,028 to *Figarella et al.*, entitled "Method and Apparatus for Detecting and Decoding Bar Code Symbols Using Two-Dimensional Digital Pixel Images," 5,352,878 to *Smith et al.*, entitled "Method and Apparatus for Decoding Bar Code Symbols Using Independent Bar and Space Analysis," 5,412,196 to *Surka*, entitled "Method and Apparatus for Decoding Bar Code Images Using Multi-Order Feature Vectors," and 5,412,197 to *Smith*, entitled "Method and Apparatus for Decoding Bar Code Symbols Using Gradient Signals," all of which are assigned to the assignee of the present invention and incorporated herein by reference. Those skilled in the art will appreciate that the machine readable code or symbol decoded by the label decoding system may include a bar code or a two-dimensional code.

At step **404** the method **308** begins the process of locating and decoding the destination address. Steps **404** through **422** are associated with the application of optical character recognition (OCR) techniques to the image provided by the high resolution camera **16**. This process is carried out in parallel with decoding the bar code (step **402**).

At step **404** the label decoding system selects a subimage of the package surface from the image provide by the high resolution camera **16**. In the preferred system, this subimage is referred to as a region of interest (ROI), which is defined with respect to the fiduciary mark **42**. In terms of the image from the high resolution camera, the region of interest is a 1k by 1k square (i.e., 1,024 pixels by 1,024 pixels, which is equivalent to approximately four inches

by four inches) centered on the defined position of the fiduciary mark **42**. The label decoding system **14** determines the position and orientation of the fiduciary mark **42** and uses that information to define the region of interest with respect to the position of the fiduciary mark **42**. The label decoding system then creates and stores a high resolution text image within the region of interest from the data captured by the high resolution camera **16**. In this manner, only a relatively small portion of the data captured by the high resolution camera **16** is processed in order to decode the destination address data. This image is referred to as the region of interest (ROI) image.

Although the system **10** locates the destination address block using the information provided by the fiduciary mark detector **24**, those skilled in the art will appreciate that software techniques may be implemented to detect the location and orientation of the destination address from the image provided by the high resolution OTB camera. Suitable techniques would eliminate the need for the fiduciary mark detector, but would require additional computing resources in the label decoding system **14**. Such software techniques may be used without departing from the spirit and scope of the present invention. Furthermore, those skilled in the art will appreciate that the fiduciary mark detector described above may be replace with other apparatus for indicating and detecting the location and orientation of an indicia on a package, such as the systems described in U.S. Patent Nos. 4,516,265 to *Kizu et al.* and 5,103,489 to *Miette*.

At step **406** the method performs adaptive thresholding on the ROI image. This technique involves binarizing the ROI image and creating three different binarized images using three different threshold values. The three threshold values are determined by measuring the contrast and relative brightness of the ROI image.

At step **408** the three images resulting from step **406** are run length encoded. At step **410** the best of the three run length encoded images is selected for further processing.

Suitable methods for carrying out steps **406**, **408**, **410** are described in commonly owned U.S. Application No. 08/380,732, filed January 31, 1995, entitled "Method and Apparatus for Separating Foreground From Background in Images Containing Text," which is incorporated herein by reference.

At step **412** the label decoding system performs a coarse rotation of the selected run length encoded image. The coarse rotation is the first of a two-step process that is designed to make the ROI image appear horizontal in order to simplify the separation of the characters. Generally described, the information derived from the fiduciary mark indicates the orientation of the destination address block and how far off of horizontal it is. The coarse rotation is the first step toward rotating the image to where the destination address appears horizontal.

The preferred method for rotating the ROI image is described in commonly owned U.S. Application No. 08/507,793, filed July 25, 1995, entitled "Method and System for Fast Rotation of Run-Length Encoded Images," which is incorporated herein by reference. Those skilled in the art will appreciate that the coarse rotation process is relatively quick and rotates the image to within ± 7 degrees of horizontal.

At step **414** the label decoding system identifies the lines of text that are contained in the destination address block **40**. This is accomplished by subsampling the image by a factor of 3 in the x and y directions, executing a connected components process that finds groups of linked pixels, and applying a Hough transform that finds line locations and orientations from the linked pixels.

Once the lines are found using the reduced resolution method, the original lines are restored to full resolution using the location information generated by the Hough transform. Another connected components analysis is applied to the full resolution lines in order to capture the text characters. Those skilled in the art will understand that connected components analysis and Hough transforms are standard image processing techniques.

Once the lines are identified, the method **308** proceeds to step **416** and performs a fine rotation on the characters included in each line of the destination address. This fine rotation completes the rotation process begun at step **412** and rotates the characters to horizontal (i.e., zero degrees). This ensures that the characters are properly oriented for the application of the OCR algorithm, which attempts to decode each character in the destination address. This step is accomplished by applying forward rotational techniques. The preferred rotational techniques are described by the following formulas:

$$x_{new} = (x_{old} * \cos \phi) + (y_{old} * \sin \phi)$$

$$y_{new} = (x_{old} * \sin \phi) - (y_{old} * \cos \phi)$$

where ø is the orientation of the destination address after the coarse rotation performed at step **412**.

At step **418** the rotated characters are segmented or separated into separate characters. This is done because the OCR algorithm is applied to each character individually. At step **420** the OCR algorithm is applied to each of the characters in the destination address. Those skilled in the art will appreciate that the OCR algorithm uses a variety of techniques to recognize each characters and to determine what standard ASCII characters is represented by each character in the destination address. Those skilled in the art will also appreciate that the OCR algorithm may be used to decode other alphanumeric information on the package, such as the return address, shipper number, etc. A suitable OCR technique is described in U.S. Patent No. 5,438,629, entitled "Method and Apparatus for Classification Using Non-spherical Neurons," which is incorporated herein by reference.

At step **422** the OCR processed text is filtered to remove any characters that are not a part of the destination address.

At step **424** the OCR processed destination address is validated or verified by attempting to match the decoded destination address with an address in the U.S. Postal Service's ZIP+4 database, which provides an exhaustive list of valid addresses in the United States. This step is necessary because the destination address and OCR algorithms do not include built in verification means such as checksums, etc.

At step **426** the method **308** determines whether the decoded destination address matched a valid address in the ZIP+4 database or other database of valid addresses. If so, the method continues to step **428** where it returns to step **310** of the method **300** (Fig. 3). Related methods for processing data in databases are described in commonly owned U.S. Application Serial No. 08/477,481, filed June 7, 1995 and entitled "A Multi-Step Large Lexicon Reduction Method for OCR Application," which is incorporated herein by reference.

If the decoded address does not match a valid address in the ZIP+4 database, the method **308** proceeds to step **430** and automatically attempts to correct common OCR errors in order to automatically provide a valid address. Typical OCR errors involve incorrectly decoding letters that look

BNSDOCID: <WO 9711790A1>

similar. Therefore, step **430** is optimized to correct OCR errors by substituting such letters in an attempt to match one of the valid addresses that appears in the address database.

Those skilled in the art will understand that the validation process is tunable and involves three parameters. The accuracy rate indicates the percentage of labels that are automatically read correctly. The error rate indicates the percentage of labels that the system thinks it is has correctly, but are in fact incorrect. The rejection rate indicates the percentage of labels that are not read correctly and which must be entered manually. The OCR validation process is tuned by first determining an acceptable error rate. Once this is determined, the system is tuned by adjusting the parameter that controls the relationship between the rejection rate and the error rate.

At step **432** the method determines whether the substituted characters have resulted in a valid address. If so, the method proceeds to step **428**.

If the method is unable to match correct the decoded address and match a valid address in the ZIP+4 database, the method proceeds to step **434** and transfers the image to a the image server **29**, which is connected to one or more image display workstations. The image display workstations display an image of the destination address block and the closest possible addresses from the database. The image display workstation allows an operator to view the image of the destination address and manually enter the destination address into the workstation. This process (step **436**) is described more completely in conjunction with Fig. 5.

At step **438** the method **308** receives the manually entered destination address data from the image server. The information returned by the image server may take the form of manually entered address data or a selected one of the possible addresses from the database. After the address data is received from the image server, the method **308** proceeds to step **428** and returns to the method **300**.

Fig. 5 is a flow diagram illustrating a method **500** carried out by the image server **29** and the image display workstations **30**a-c that form a part of the preferred system **10**. As described above, the image display workstations are used to allow an operator to manually enter destination addresses that were not properly matched to valid addresses in the ZIP+4 database. This is accomplished by displaying an image of the destination

address and the closest possible addresses from the database. The operator reads the address as it appears on the display and manually enters the address into the workstation or selects one of the displayed addresses. This manually entered address data is then returned to the label decoding system **14** where it replaces the improperly decoded OCR data.

The method **500** begins at step **502** where the image server receives the image of the destination address from the label decoding system **14**. The image server routes the image to a free image display workstation. At step **504** the image display workstation rotates the image to the nearest horizontal or vertical axis. At step **506** the rotated image is interpolated to form an image having a resolution of at least 100 dots per inch (DPI) image, which is displayed at step **508**. In addition to the destination address image, the workstation also displays the closest possible matches from the ZIP+4 database.

At step **510** the operator manually enters the destination address after having read the destination address presented on the display. The operator manually enters the correct destination address by selecting the correct address from the closest possible matches (if the correct address is displayed) or entering the address using a keyboard associated with the image display workstation.

At step **512** the method determines whether the destination address data entered by the operator was selected from the list of possible addresses selected from the database. If so, the method proceeds to step **514** and returns the correct destination address to the image server **29**, which returns the data to the label decoding system **14**. The method **500** then terminates at step **518**.

If at step **512** the method determines that the destination address data was typed in by the operator, the method goes to step **516** to validate the typed-in data. Those skilled in the art will appreciate that the error correction routine may be carried out at the image display workstation where the data was entered, at the image server after the data was returned from the image display workstation, or at a separate validation computer connected to the image server via the network.

Those skilled in the art will appreciate that the validation process of step **516** determines whether the keyed in address matches a valid address from the database. If not, the method also attempts to correct common key entry mistakes in order to see if the corrected key entered data matches one of

BNSDOCID: <WO 9711790A1>

the addresses from the database. The validation/correction process is similar to the correction process described in conjunction with step **430** of Fig. 4, but is optimized for common key entry errors, which include substituting keys that are close together on the keyboard or letters that are transposed by the operator. The correction can be carried out by attempting to match a valid address from any address in the ZIP+4 database, or by trying to match one of the few close addresses transferred to the image display workstation from the label decoding system.

After the manually entered destination address data is validated, the method proceeds to step **514** and returns the correct destination address to the image server **29**, which returns the data to the label decoding system **14**. The method **500** then terminates at step **518**.

From the foregoing description, it will be appreciated that the present invention provides an efficient system and method for reading package information. The present invention has been described in relation to particular embodiments which are intended in all respects to be illustrative rather than restrictive. Those skilled in the art will appreciate that many different combinations of hardware will be suitable for practicing the present invention. Many commercially available substitutes, each having somewhat different cost and performance characteristics, exist for each of the components described above.

Similarly, the method of the present invention may conveniently be implemented in program modules that are based upon the flow charts in Figs. 3-5. No particular programming language has been indicated for carrying out the various procedures described above because it is considered that the operations, steps and procedures described above and illustrated in the accompanying drawings are sufficiently disclosed to permit one of ordinary skill in the art to practice the instant invention. Moreover, there are many computers and operating systems which may be used in practicing the instant invention and therefore no detailed computer program could be provided which would be applicable to these many different systems. Each user of a particular computer will be aware of the language and tools which are most useful for that user's needs and purposes.

Alternative embodiments will become apparent to those skilled in the art to which the present invention pertains without departing from its spirit

and scope. Accordingly, the scope of the present invention is defined by the appended claims rather than the foregoing description.

Claims

What is claimed is:

1. A method for reading package information from a package (20), said package information including first information indicia (36) and second information indicia (38), comprising the steps of:

capturing an image of said package (20), said image including said first information indicia (36) and said second information indicia (38);

locating said first information indicia (36) in said image;

decoding said first information indicia (36) to provide first package data;

locating said second information indicia (38);

decoding said second information indicia (38) to provide second package data; and

combining said first package data and said second package data to form a unified package record.

2. A method for reading package information according to claim 1, further comprising the steps of:

determining whether said second package data is valid;

displaying said image on a workstation (30); and

receiving manually entered second package data, and wherein said unified package record comprises said first package data and said manually entered second package data.

3. A method for reading package information according to claim 2, wherein said manually entered second package data comprises a destination address selected from a list of possible destination addresses displayed on said workstation (30).

4. A method for reading package information according to claim 1 or claim 2, wherein said first information indicia (36) comprises a machine readable symbol and said first package data comprises a package identification number.

5. A method for reading package information according to claim 1 or claim 2, wherein said first information indicia (36) comprises a bar code and said first package data comprises a package identification number.

6. A method for reading package information according to claim 1 or claim 2, wherein said second information indicia (38) comprises alphanumeric characters and said second package data comprises package destination information.

7. A method for reading package information according to claim 1 or claim 2, further comprising the step of storing said unified package record in a database.

8. A method for reading package information according to claim 1 or claim 2, further comprising the steps of:

printing a label containing said unified package record; and

affixing said label to said package (20).

9. A method for reading package information according to claim 1 or claim 2, wherein locating said second information indicia (38) comprises the steps of:

identifying a mark (42) indicative of the location of said second information indicia (38); and

using said mark (42) to locate said second information indicia (38).

10. A method for reading package information according to claim 9, further comprising the step of rotating said second information indicia (38).

11. A system for reading package information from a package (20), said package information including first information indicia (36) and second information indicia (38), comprising:

an imaging system including a camera (16) for capturing an image of said package (20);

a label decoding system (14) for processing said image; and

a printer for printing a label to be affixed to said package (20);

said label decoding system (14) being programmed to:

locate said first information indicia (36) in said image;

decode said first information indicia (36) to provide first package data;

locate said second information indicia (38);

decode said second information indicia (38) to provide second package data; and

combine said first package data and said second package data to form a unified package record for printing on said label.

12. A system for reading package information according to claim 11, further comprising an image display workstation (30) for displaying at least a portion of said image and for receiving manually entered data corresponding to said second information indicia (38), and wherein said label decoding system (14) is further programmed to:

determine whether said second package data is valid;

display said image on said workstation (30); and

receive manually entered second package data, and wherein said unified package record comprises said first package data and said manually entered second package data.

13. A system for reading package information according to claim 11 or claim 12, wherein said first information indicia (36) comprises a machine readable symbol and said first package data comprises a package identification number.

SUBSTITUTE SHEET (RULE 26) <WO 9711790A1>

14. A system for reading package information according to claim 11 or claim 12, wherein said first information indicia (36) comprises a bar code and said first package data comprises a package identification number.

15. A system for reading package information according to claim 11 or claim 12, wherein said second information indicia (38) comprises alphanumeric characters and said second package data comprises package destination information.

16. A system for reading package information according to claim 11 or claim 12, wherein said label decoding system (14) is further programmed to store said unified package record in a database.

17. A system for reading package information according to claim 11 or claim 12, wherein locating said second information indicia (38) comprises:

identifying a mark (42) indicative of the location of said second information indicia (38); and

using said mark (42) to locate said second information indicia (38).

BNSDOCID: <WO 9711790A1>

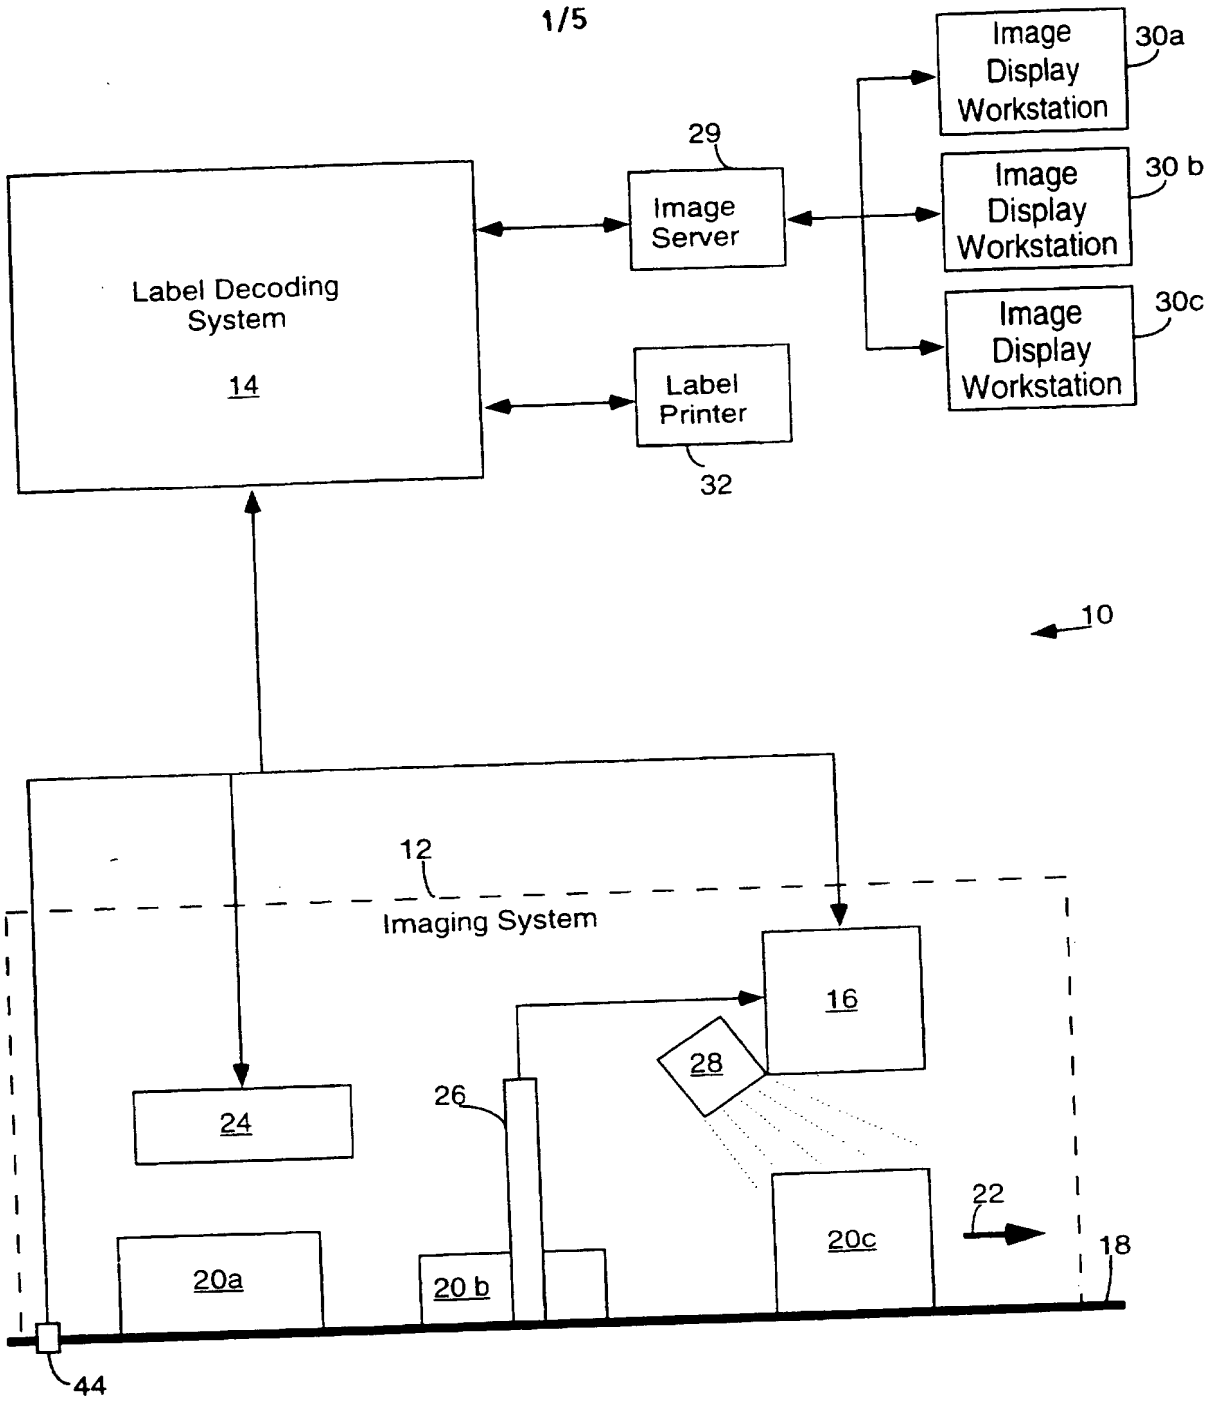

Image Display Workstation
30a
29
Image Server
Image Display Workstation
30 b
Label Decoding System
14
Image Display Workstation
30c
Label Printer
32
10
12
Imaging System
16
28
26
24
22
20c
18
20a
20 b
44

Fig. 1

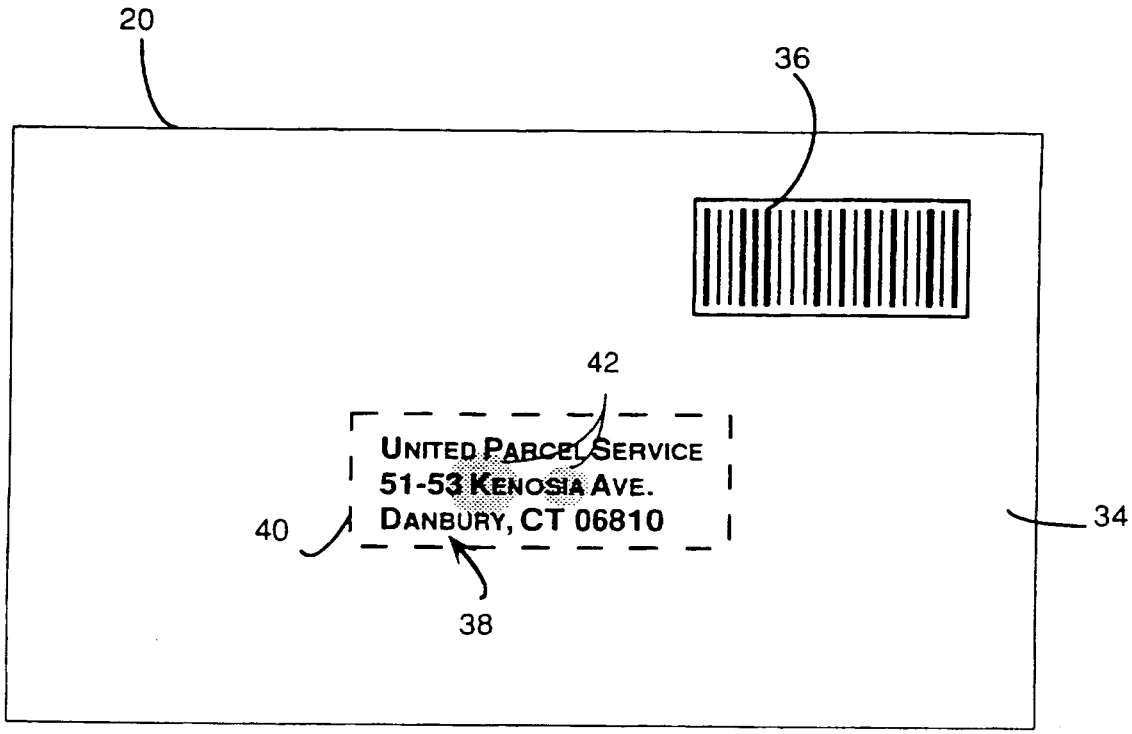


FIG. 2

NSDOCID: <WO 9711790A1>

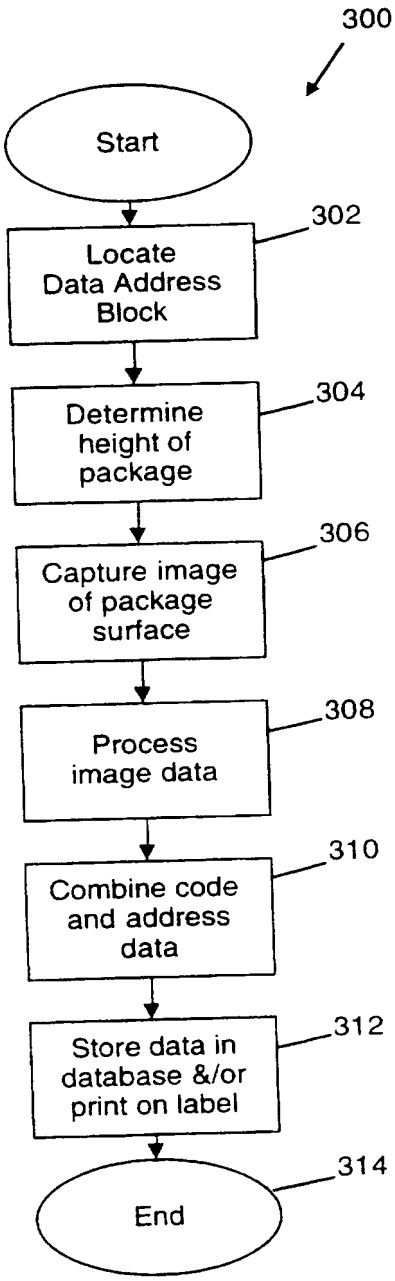


Fig. 3

Main Flow

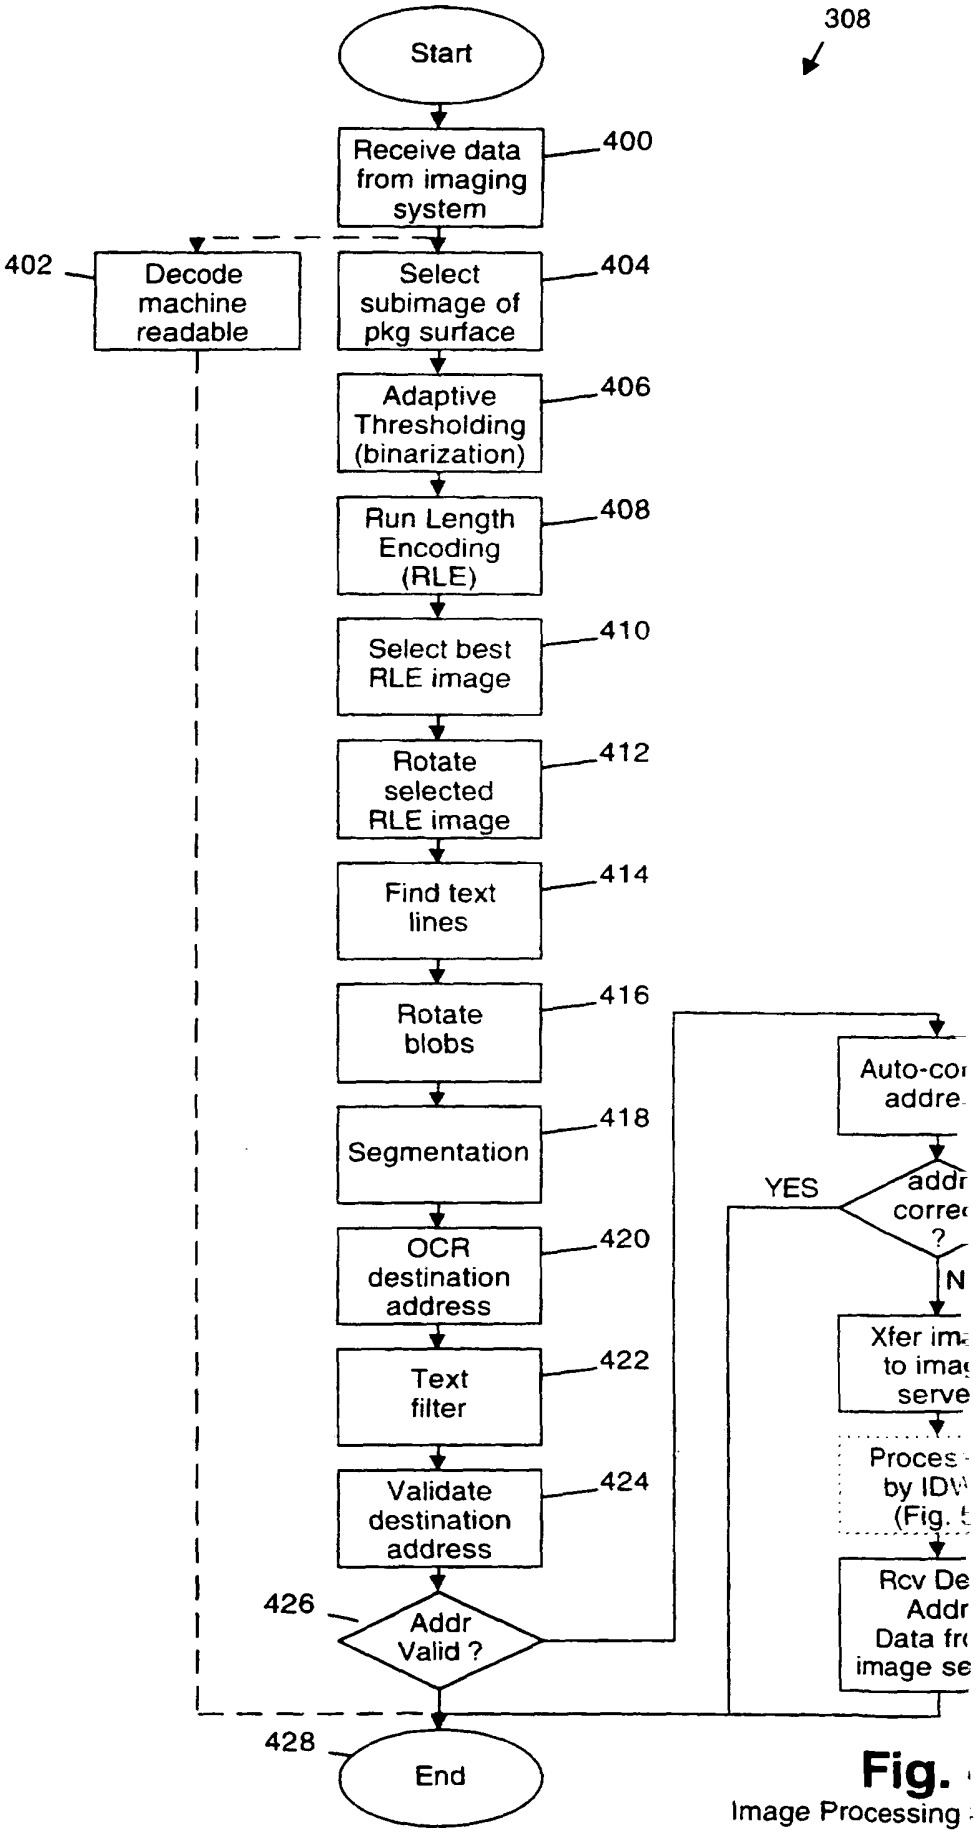


Fig.
Image Processing

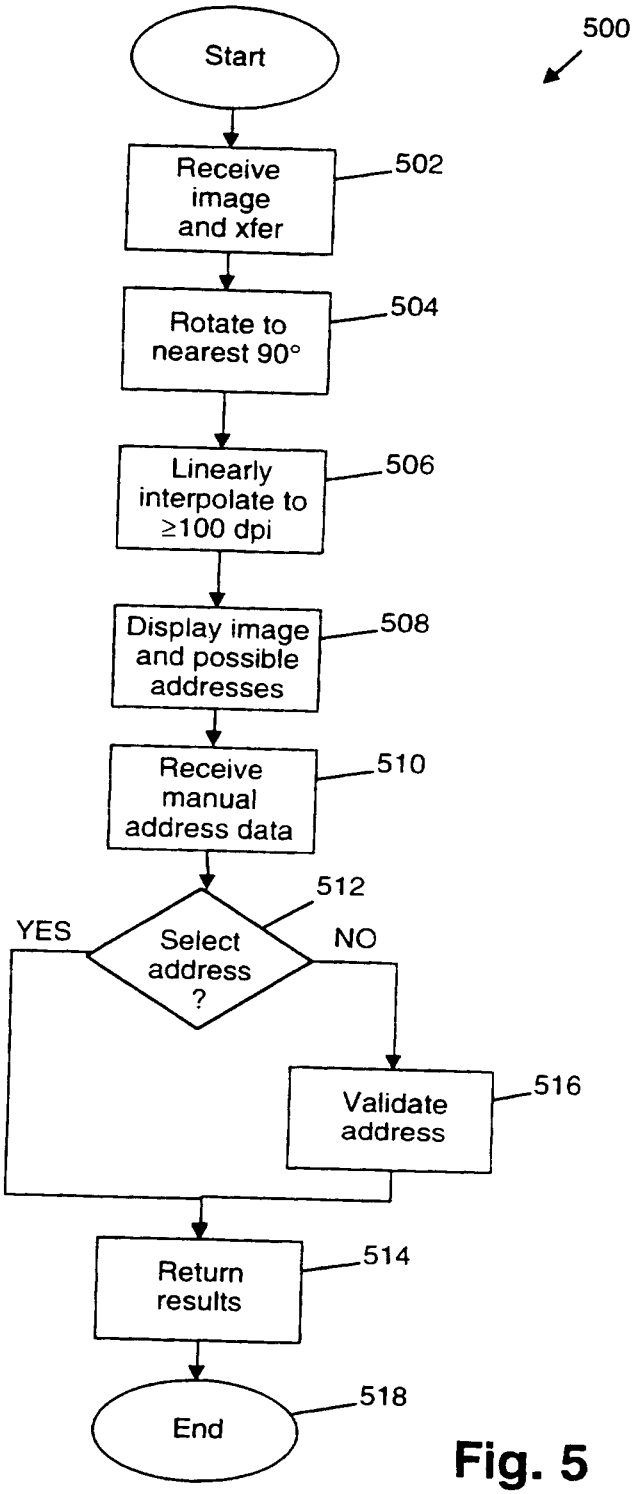

500
Start
Receive image and xfer
502
Rotate to nearest 90°
504
Linearly interpolate to ≥100 dpi
506
Display image and possible addresses
508
Receive manual address data
510
512
Select address ?
YES
NO
Validate address
516
Return results
514
End
518

Fig. 5

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 96/15218

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 B07C3/14 B07C3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 B07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US,A,4 832 204 (HANDY ET AL) 23 May 1989	1,4-7,9, 10
A	see the whole document	11,13-16

Y	US,A,4 776 464 (MILLER ET AL) 11 October 1988	1,4-7,9, 10
	see column 2, line 24 - column 4, line 25; figures 1-3	
A	see column 7, line 62 - column 8, line 5; figure 5	11,13-17

A	US,A,4 921 107 (HOFER) 1 May 1990	2,3,8, 11,12
	see abstract; figures 1,2	

	-/--	

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
15 January 1997	24. 01 97

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+ 31-70) 340-3016	Forlen, G

Form PCT/ISA/210 (second sheet) (July 1992)

BNSDOCID: <WO 9711790A1>

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE,A,39 42 932 (LICENTIA PATENT-VERWALTUNGS-GMBH) 27 June 1991 see abstract; figure 1 see column 4, line 12 - line 21	1-3,6, 11,12,15
A	EP,A,0 647 479 (GALAI LABORATORIES) 12 April 1995 see abstract; figure 1	1,6,9, 11,15,17

BNSDOCID: <WO 9711790A1>

INTERNATIONAL SEARCH REPORT

...information on patent family members

Inter...nal Application No
PCT/US 96/15218

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US-A-4832204	23-05-89	NONE		
US-A-4776464	11-10-88	NONE		
US-A-4921107	01-05-90	NONE		
DE-A-3942932	27-06-91	AT-T-	107544	15-07-94
		AU-B-	635607	25-03-93
		AU-A-	7059491	24-07-91
		CA-A-	2045694	24-06-91
		CZ-B-	278655	13-04-94
		DE-D-	59006241	28-07-94
		WO-A-	9109688	11-07-91
		EP-A-	0462256	27-12-91
		ES-T-	2056635	01-10-94
		HR-A-	930034	28-02-95
		IE-B-	65565	01-11-95
		JP-T-	4503921	16-07-92
		NZ-A-	236633	27-04-94
		PL-B-	165615	31-01-95
		US-A-	5311999	17-05-94
EP-A-647479	12-04-95	NONE		

BNSDOCID: <WO 9711790A1>

PCT

WELTORGANISATION FÜR GEISTIGES EIGENTUM
Internationales Büro

INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

(51) Internationale Patentklassifikation 6 : G06F 7/06

A1

(11) Internationale Veröffentlichungsnummer: WO 99/42921

(43) Internationales Veröffentlichungsdatum: 26. August 1999 (26.08.99)

(21) Internationales Aktenzeichen: PCT/EP99/01091

(22) Internationales Anmeldedatum: 19. Februar 1999 (19.02.99)

(30) Prioritätsdaten:

198 07 177.9	20. Februar 1998 (20.02.98)	DE
198 22 751.5	20. Mai 1998 (20.05.98)	DE

(71) Anmelder *(für alle Bestimmungsstaaten ausser US)*: SCIL ANIMAL CARE COMPANY GMBH [DE/DE]; Robert-Bosch-Strasse 5a, D-68519 Viernheim (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder *(nur für US)*: RUDLOFF, Peter [DE/DE]; Stahlbühlring 60, D-68526 Ladenburg (DE).

(74) Anwalt: SCHLIMME, Wolfram; Rosenheimer Landstrasse 115, D-85521 Ottobrunn (DE).

(81) Bestimmungsstaaten: AU, BR, BY, CA, CN, CZ, EE, HR, HU, ID, IL, IN, JP, KR, LT, LV, MX, NZ, PL, RU, SG, SI, TR, US, europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Veröffentlicht

Mit internationalem Recherchenbericht.

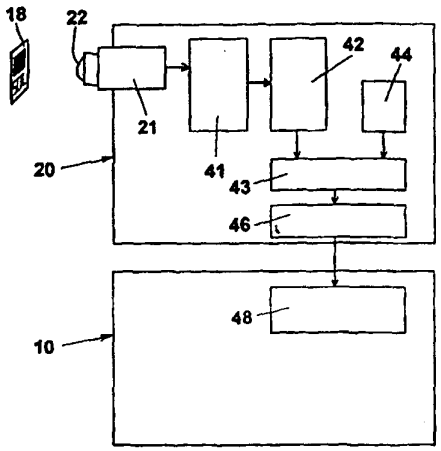
Vor Ablauf der für Änderungen der Ansprüche zugelassenen Frist; Veröffentlichung wird wiederholt falls Änderungen eintreffen.

(54) Title: SYSTEM AND METHOD FOR IDENTIFYING AND AUTHENTICATING ACCESSORIES, AUXILIARY AGENTS AND/OR FUELS FOR TECHNICAL APPARATUS

(54) Bezeichnung: SYSTEM UND VERFAHREN ZUR IDENTIFIZIERUNG UND AUTHENTIFIZIERUNG VON ZUBEHÖR, HILFS- UND/ODER BETRIEBSSTOFFEN FÜR TECHNISCHE GERÄTE

(57) Abstract

The invention relates to a system for identifying and authenticating accessories, auxiliary agents and/or fuel for technical apparatus (10), whereby the accessories, auxiliary agents or fuel or the containers containing them are fitted with a data storage section (18) on which information is stored which is visible to the human eye and has distinctive qualities to the human observer. The technical apparatus (10) has a reading and evaluation device (20) for the information which comprises a comparing device (43) for comparing the information that has been read with a stored information, and a release control (46) for at least one functional component (48) of the technical apparatus (10). When the information read conforms with the stored information an authentication signal or release signal is transmitted from the release control (46) to the functional component (48) which then allows for the technical apparatus (10) to be used. If the information read does not conform with the stored information it blocks the use of the technical apparatus (10) and emits a warning signal.



(57) Zusammenfassung

Bei einem System zur Identifizierung und Authentifizierung von Zubehör, Hilfsstoffen und/oder Betriebsstoffen für technische Geräte (10) sind das Zubehör beziehungsweise die Hilfs- oder Betriebsstoffe oder deren Aufbewahrungsgefäße mit einem Datenträgerabschnitt (18) versehen, auf dem für das menschliche Auge erkennbare und für einen menschlichen Betrachter unterscheidungskräftige Information gespeichert ist. Dabei ist das technische Gerät (10) mit einer Lese- und Auswertevorrichtung (20) für diese Information versehen. Die Lese- und Auswertevorrichtung (20) weist eine Vergleichseinrichtung (43) zum Vergleich der gelesenen Information mit einer gespeicherten Information sowie eine Freigabesteuerung (46) für zumindest eine Funktionskomponente (48) des technischen Geräts auf. Bei einer Übereinstimmung der gelesenen Information mit der gespeicherten Information wird ein Authentifizierungssignal oder Freigabesignal von der Freigabesteuerung (46) an die Funktionskomponente (48) geliefert, die daraufhin den Betrieb des technischen Geräts (10) ermöglicht und die bei fehlender Übereinstimmung der gelesenen Information mit der gespeicherten Information den Betrieb des technischen Geräts (10) sperrt und ein Warnsignal ausgibt.

VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT
AUF DEM GEBIET DES PATENTWESENS

PCT

INTERNATIONALER RECHERCHENBERICHT

(Artikel 18 sowie Regeln 43 und 44 PCT)

Aktenzeichen des Anmelders oder Anwalts	WEITERES VORGEHEN	siehe Mitteilung über die Übermittlung des internationalen Recherchenberichts (Formblatt PCT/ISA/220) sowie, soweit zutreffend, nachstehender Punkt 5
S 1055		
Internationales Aktenzeichen	Internationales Anmeldedatum *(Tag/Monat/Jahr)*	(Frühestes) Prioritätsdatum *(Tag/Monat/Jahr)*
PCT/EP 99/ 01091	19/02/1999	20/02/1998
Anmelder		
SCIL ANIMAL CARE COMPANY GMBH et al.		

Dieser internationale Recherchenbericht wurde von der Internationalen Recherchenbehörde erstellt und wird dem Anmelder gemäß Artikel 18 übermittelt. Eine Kopie wird dem Internationalen Büro übermittelt.

Dieser internationale Recherchenbericht umfaßt insgesamt 4 Blätter.

[X] Darüber hinaus liegt ihm jeweils eine Kopie der in diesem Bericht genannten Unterlagen zum Stand der Technik bei.

1. **Grundlage des Berichts**

 a. Hinsichtlich der **Sprache** ist die internationale Recherche auf der Grundlage der internationalen Anmeldung in der Sprache durchgeführt worden, in der sie eingereicht wurde, sofern unter diesem Punkt nichts anderes angegeben ist.

 [] Die internationale Recherche ist auf der Grundlage einer bei der Behörde eingereichten Übersetzung der internationalen Anmeldung (Regel 23.1 b)) durchgeführt worden.

 b. Hinsichtlich der in der internationalen Anmeldung offenbarten **Nucleotid- und/oder Aminosäuresequenz** ist die internationale Recherche auf der Grundlage des Sequenzprotokolls durchgeführt worden, das

 [] in der internationalen Anmeldung in Schriftlicher Form enthalten ist.

 [] zusammen mit der internationalen Anmeldung in computerlesbarer Form eingereicht worden ist.

 [] bei der Behörde nachträglich in schriftlicher Form eingereicht worden ist.

 [] bei der Behörde nachträglich in computerlesbarer Form eingereicht worden ist.

 [] Die Erklärung, daß das nachträglich eingereichte schriftliche Sequenzprotokoll nicht über den Offenbarungsgehalt der internationalen Anmeldung im Anmeldezeitpunkt hinausgeht, wurde vorgelegt.

 [] Die Erklärung, daß die in computerlesbarer Form erfaßten Informationen dem schriftlichen Sequenzprotokoll entsprechen, wurde vorgelegt.

2. [] ***Bestimmte Ansprüche haben sich als nicht recherchierbar erwiesen*** *(siehe Feld I)*.

3. [] **Mangelnde Einheitlichkeit der Erfindung** (siehe Feld II).

4. Hinsichtlich der **Bezeichnung der Erfindung**

 [X] wird der vom Anmelder eingereichte Wortlaut genehmigt.

 [] wurde der Wortlaut von der Behörde wie folgt festgesetzt:

5. Hinsichtlich der **Zusammenfassung**

 [] wird der vom Anmelder eingereichte Wortlaut genehmigt.

 [X] wurde der Wortlaut nach Regel 38.2b) in der in Feld III angegebenen Fassung von der Behörde festgesetzt. Der Anmelder kann der Behörde innerhalb eines Monats nach dem Datum der Absendung dieses internationalen Recherchenberichts eine Stellungnahme vorlegen.

6. Folgende Abbildung der **Zeichnungen** ist mit der Zusammenfassung zu veröffentlichen: Abb. Nr. 3

 [X] wie vom Anmelder vorgeschlagen [] keine der Abb.

 [] weil der Anmelder selbst keine Abbildung vorgeschlagen hat.

 [] weil diese Abbildung die Erfindung besser kennzeichnet.

INTERNATIONALER RECHERCHENBERICHT

Feld III **WORTLAUT DER ZUSAMMENFASSUNG (Fortsetzung von Punkt 5 auf Blatt 1)**

Die Zusammenfassung wird wie folgt geändert:

Zeile 3: nach "Geräte" ist "(10)"einzufügen;
Zeile 5: nach "Datenträgerabschnitt" ist "(18)"einzufügen;
Zeile 8: nach "Gerät" ist "(10)"einzufügen;
Zeile 9: nach "Auswertevorrichtung" ist "(20)"einzufügen;
Zeile 10: nach "Auswertevorrichtung" ist "(20)"einzufügen;
Zeile 10: nach "Vergleichseinrichtung" ist "(43)"einzufügen;
Zeile 12: nach "Freigabesteuerung" ist "(46)"einzufügen;
Zeile 13: nach "Funktionskomponente" ist "(48)"einzufügen;
Zeile 16: nach "Freigabesteuerung" ist "(46)"einzufügen;
Zeile 17: nach "Funktionskomponente" ist "(48)"einzufügen;
Zeile 18: nach "Geräts" ist "(10)"einzufügen;
Zeile 20: nach "Geräts" ist "(10)"einzufügen;

INTERNATIONALER RECHERCHENBERICHT

Internationales Aktenzeichen
PCT/EP 99/01091

A. KLASSIFIZIERUNG DES ANMELDUNGSGEGENSTANDES
IPK 6 G07F7/06

Nach der Internationalen Patentklassifikation (IPK) oder nach der nationalen Klassifikation und der IPK

B. RECHERCHIERTE GEBIETE

Recherchierter Mindestprüfstoff (Klassifikationssystem und Klassifikationssymbole)
IPK 6 G07F B07C G06K

Recherchierte aber nicht zum Mindestprüfstoff gehörende Veröffentlichungen, soweit diese unter die recherchierten Gebiete fallen

Während der internationalen Recherche konsultierte elektronische Datenbank (Name der Datenbank und evtl. verwendete Suchbegriffe)

C. ALS WESENTLICH ANGESEHENE UNTERLAGEN

Kategorie°	Bezeichnung der Veröffentlichung, soweit erforderlich unter Angabe der in Betracht kommenden Teile	Betr. Anspruch Nr.
X	WO 97 11790 A (UNITED PARCEL SERVICE INC) 3. April 1997 (1997-04-03)	1-9,11, 12
Y	Zusammenfassung Seite 1, Zeile 30 - Seite 4, Zeile 10 Abbildung 2	10

Y	EP 0 733 991 A (SYMBOL TECHNOLOGIES INC) 25. September 1996 (1996-09-25)	10
A	Seite 5, Zeile 3 - Zeile 10 Abbildung 3	9

A	US 5 361 913 A (MELCHIONNA CARMINE M) 8. November 1994 (1994-11-08)	1,4,11, 12
	Zusammenfassung Spalte 2, Zeile 58 - Spalte 5, Zeile 63	

	-/--	

[X] Weitere Veröffentlichungen sind der Fortsetzung von Feld C zu entnehmen

[X] Siehe Anhang Patentfamilie

° Besondere Kategorien von angegebenen Veröffentlichungen :

"A" Veröffentlichung, die den allgemeinen Stand der Technik definiert, aber nicht als besonders bedeutsam anzusehen ist

"E" älteres Dokument, das jedoch erst am oder nach dem internationalen Anmeldedatum veröffentlicht worden ist

"L" Veröffentlichung, die geeignet ist, einen Prioritätsanspruch zweifelhaft erscheinen zu lassen, oder durch die das Veröffentlichungsdatum einer anderen im Recherchenbericht genannten Veröffentlichung belegt werden soll oder die aus einem anderen besonderen Grund angegeben ist (wie ausgeführt)

"O" Veröffentlichung, die sich auf eine mündliche Offenbarung, eine Benutzung, eine Ausstellung oder andere Maßnahmen bezieht

"P" Veröffentlichung, die vor dem internationalen Anmeldedatum, aber nach dem beanspruchten Prioritätsdatum veröffentlicht worden ist

"T" Spätere Veröffentlichung, die nach dem internationalen Anmeldedatum oder dem Prioritätsdatum veröffentlicht worden ist und mit der Anmeldung nicht kollidiert, sondern nur zum Verständnis des der Erfindung zugrundeliegenden Prinzips oder der ihr zugrundeliegenden Theorie angegeben ist

"X" Veröffentlichung von besonderer Bedeutung; die beanspruchte Erfindung kann allein aufgrund dieser Veröffentlichung nicht als neu oder auf erfinderischer Tätigkeit beruhend betrachtet werden

"Y" Veröffentlichung von besonderer Bedeutung; die beanspruchte Erfindung kann nicht als auf erfinderischer Tätigkeit beruhend betrachtet werden, wenn die Veröffentlichung mit einer oder mehreren anderen Veröffentlichungen dieser Kategorie in Verbindung gebracht wird und diese Verbindung für einen Fachmann naheliegend ist

"&" Veröffentlichung, die Mitglied derselben Patentfamilie ist

Datum des Abschlusses der internationalen Recherche	Absendedatum des internationalen Recherchenberichts
4. August 1999	11/08/1999

Name und Postanschrift der Internationalen Recherchenbehörde	Bevollmächtigter Bediensteter
Europäisches Patentamt, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Jacobs, P

5

Formblatt PCT/ISA/210 (Blatt 2) (Juli 1992)

Internationales Aktenzeichen
PCT/EP 99/01091

C.(Fortsetzung) ALS WESENTLICH ANGESEHENE UNTERLAGEN

Kategorie°	Bezeichnung der Veröffentlichung, soweit erforderlich unter Angabe der in Betracht kommenden Teile	Betr. Anspruch Nr.
A	DE 32 05 420 A (METALLGESELLSCHAFT AG) 25. August 1983 (1983-08-25) Zusammenfassung Seite 5, Absätze 1,2	1-5,7, 11,12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/EP 99/01091

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9711790 A	03-04-1997	US 5770841 A	23-06-1998
		CA 2231450 A	03-04-1997
		EP 0852520 A	15-07-1998
EP 0733991 A	25-09-1996	US 5304786 A	19-04-1994
		AU 637409 B	27-05-1993
		AU 6392390 A	09-10-1990
		CA 2026387 A	06-07-1991
		DE 69027762 D	14-08-1996
		DE 69027762 T	09-01-1997
		DE 69033063 D	20-05-1999
		EP 0439682 A	07-08-1991
		EP 0565738 A	20-10-1993
		JP 2846442 B	13-01-1999
		JP 3204793 A	06-09-1991
		US 5506697 A	09-04-1996
		US 5399846 A	21-03-1995
		US 5471533 A	28-11-1995
		US 5489158 A	06-02-1996
		US 5635697 A	03-06-1997
		US 5504322 A	02-04-1996
		US 5644408 A	01-07-1997
		US 5710419 A	20-01-1998
		US 5796090 A	18-08-1998
		US 5760382 A	02-06-1998
		US 5837986 A	17-11-1998
		US 5243655 A	07-09-1993
		US 5337361 A	09-08-1994
		US 5880453 A	09-03-1999
US 5361913 A	08-11-1994	NONE	
DE 3205420 A	25-08-1983	NONE	

PCT

WELTORGANISATION FÜR GEISTIGES EIGENTUM
Internationales Büro

INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

(51) Internationale Patentklassifikation 6 : G06F 7/06

A1

(11) Internationale Veröffentlichungsnummer: WO 99/42921

(43) Internationales Veröffentlichungsdatum: 26. August 1999 (26.08.99)

(21) Internationales Aktenzeichen: PCT/EP99/01091

(22) Internationales Anmeldedatum: 19. Februar 1999 (19.02.99)

(30) Prioritätsdaten:

198 07 177.9	20. Februar 1998 (20.02.98)	DE
198 22 751.5	20. Mai 1998 (20.05.98)	DE

(71) Anmelder *(für alle Bestimmungsstaaten ausser US)*: SCIL ANIMAL CARE COMPANY GMBH [DE/DE]; Robert–Bosch–Strasse 5a, D–68519 Viernheim (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder *(nur für US)*: RUDLOFF, Peter [DE/DE]; Stahlbühlring 60, D–68526 Ladenburg (DE).

(74) Anwalt: SCHLIMME, Wolfram; Rosenheimer Landstrasse 115, D–85521 Ottobrunn (DE).

(81) Bestimmungsstaaten: AU, BR, BY, CA, CN, CZ, EE, HR, HU, ID, IL, IN, JP, KR, LT, LV, MX, NZ, PL, RU, SG, SI, TR, US, europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Veröffentlicht

Mit internationalem Recherchenbericht.

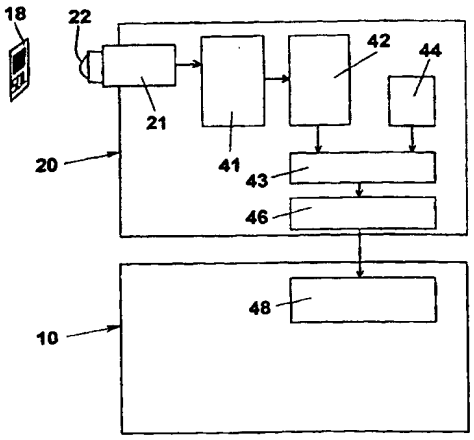
Vor Ablauf der für Änderungen der Ansprüche zugelassenen Frist; Veröffentlichung wird wiederholt falls Änderungen eintreffen.

(54) Title: SYSTEM AND METHOD FOR IDENTIFYING AND AUTHENTICATING ACCESSORIES, AUXILIARY AGENTS AND/OR FUELS FOR TECHNICAL APPARATUS

(54) Bezeichnung: SYSTEM UND VERFAHREN ZUR IDENTIFIZIERUNG UND AUTHENTIFIZIERUNG VON ZUBEHÖR, HILFS– UND/ODER BETRIEBSSTOFFEN FÜR TECHNISCHE GERÄTE

(57) Abstract

The invention relates to a system for identifying and authenticating accessories, auxiliary agents and/or fuel for technical apparatus (10), whereby the accessories, auxiliary agents or fuel or the containers containing them are fitted with a data storage section (18) on which information is stored which is visible to the human eye and has distinctive qualities to the human observer. The technical apparatus (10) has a reading and evaluation device (20) for the information which comprises a comparing device (43) for comparing the information that has been read with a stored information, and a release control (46) for at least one functional component (48) of the technical apparatus (10). When the information read conforms with the stored information an authentication signal or release signal is transmitted from the release control (46) to the functional component (48) which then allows for the technical apparatus (10) to be used. If the information read does not conform with the stored information it blocks the use of the technical apparatus (10) and emits a warning signal.



(57) Zusammenfassung

Bei einem System zur Identifizierung und Authentifizierung von Zubehör, Hilfsstoffen und/oder Betriebsstoffen für technische Geräte (10) sind das Zubehör beziehungsweise die Hilfs– oder Betriebsstoffe oder deren Aufbewahrungsgefäße mit einem Datenträgerabschnitt (18) versehen, auf dem für das menschliche Auge erkennbare und für einen menschlichen Betrachter unterscheidungskräftige Information gespeichert ist. Dabei ist das technische Gerät (10) mit einer Lese– und Auswertevorrichtung (20) für diese Information versehen. Die Lese– und Auswertevorrichtung (20) weist eine Vergleichseinrichtung (43) zum Vergleich der gelesenen Information mit einer gespeicherten Information sowie eine Freigabesteuerung (46) für zumindest eine Funktionskomponente (48) des technischen Geräts auf. Bei einer Übereinstimmung der gelesenen Information mit der gespeicherten Information wird ein Authentifizierungssignal oder Freigabesignal von der Freigabesteuerung (46) an die Funktionskomponente (48) geliefert, die daraufhin den Betrieb des technischen Geräts (10) ermöglicht und die bei fehlender Übereinstimmung der gelesenen Information mit der gespeicherten Information den Betrieb des technischen Geräts (10) sperrt und ein Warnsignal ausgibt.

LEDIGLICH ZUR INFORMATION

Codes zur Identifizierung von PCT-Vertragsstaaten auf den Kopfbögen der Schriften, die internationale Anmeldungen gemäss dem PCT veröffentlichen.

AL	Albanien	**ES**	Spanien	**LS**	Lesotho	**SI**	Slowenien
AM	Armenien	**FI**	Finnland	**LT**	Litauen	**SK**	Slowakei
AT	Österreich	**FR**	Frankreich	**LU**	Luxemburg	**SN**	Senegal
AU	Australien	**GA**	Gabun	**LV**	Lettland	**SZ**	Swasiland
AZ	Aserbaidschan	**GB**	Vereinigtes Königreich	**MC**	Monaco	**TD**	Tschad
BA	Bosnien-Herzegowina	**GE**	Georgien	**MD**	Republik Moldau	**TG**	Togo
BB	Barbados	**GH**	Ghana	**MG**	Madagaskar	**TJ**	Tadschikistan
BE	Belgien	**GN**	Guinea	**MK**	Die ehemalige jugoslawische Republik Mazedonien	**TM**	Turkmenistan
BF	Burkina Faso	**GR**	Griechenland			**TR**	Türkei
BG	Bulgarien	**HU**	Ungarn	**ML**	Mali	**TT**	Trinidad und Tobago
BJ	Benin	**IE**	Irland	**MN**	Mongolei	**UA**	Ukraine
BR	Brasilien	**IL**	Israel	**MR**	Mauretanien	**UG**	Uganda
BY	Belarus	**IS**	Island	**MW**	Malawi	**US**	Vereinigte Staaten von Amerika
CA	Kanada	**IT**	Italien	**MX**	Mexiko		
CF	Zentralafrikanische Republik	**JP**	Japan	**NE**	Niger	**UZ**	Usbekistan
CG	Kongo	**KE**	Kenia	**NL**	Niederlande	**VN**	Vietnam
CH	Schweiz	**KG**	Kirgisistan	**NO**	Norwegen	**YU**	Jugoslawien
CI	Côte d'Ivoire	**KP**	Demokratische Volksrepublik Korea	**NZ**	Neuseeland	**ZW**	Zimbabwe
CM	Kamerun			**PL**	Polen		
CN	China	**KR**	Republik Korea	**PT**	Portugal		
CU	Kuba	**KZ**	Kasachstan	**RO**	Rumänien		
CZ	Tschechische Republik	**LC**	St. Lucia	**RU**	Russische Föderation		
DE	Deutschland	**LI**	Liechtenstein	**SD**	Sudan		
DK	Dänemark	**LK**	Sri Lanka	**SE**	Schweden		
EE	Estland	**LR**	Liberia	**SG**	Singapur		

System und Verfahren zur Identifizierung und Authentifizierung von Zubehör, Hilfs- und/oder Betriebsstoffen für technische Geräte

Die Erfindung betrifft ein System zur Identifizierung und Authentifizierung von Zubehör, Hilfs- und/oder Betriebsstoffen für technische Geräte. Sie betifft weiterhin ein Verfahren zur Erkennung und Decodierung von auf einem optisch lesbaren Datenträgerabschnitt gespeicherter Information.

Es kommt häufig vor, daß Zubehörteile oder Hilfsstoffe beziehungsweise Betriebsstoffe für technische Geräte außer vom Hersteller des technischen Gerätes auch von Drittanbietern hergestellt und vertrieben werden. Häufig entsprechen derartige Produkte von Drittanbietern nicht den hohen Qualitäts- und Sicherheitsanforderungen des Herstellers des technischen Geräts, lassen sich jedoch ohne größere technische Probleme in Verbindung mit dem technischen Gerät einsetzen. Für den Hersteller eines technischen Geräts ist es im allgemeinen schwierig, die Zuverlässigkeit und Sicherheit des technischen Geräts zu gewährleisten, wenn derartige Zubehörprodukte oder Hilfs- beziehungsweise Betriebsstoffe von Drittanbietern eingesetzt werden, da die Entscheidung

über den Einsatz derartiger Drittanbieter-Produkte im allgemeinen beim Benutzer des technischen Geräts liegt.

Es ist daher nicht nur im Interesse des Geräteherstellers sondern auch im Interesse der Benutzer derartiger technischer Geräte, wenn zuverlässig gewährleistet wird, daß technische Geräte ausschließlich mit vom Gerätehersteller autorisiertem Zubehör und mit vom Gerätehersteller autorisierten Hilfs- beziehungsweise Betriebsstoffen eingesetzt werden können.

Es ist daher die Aufgabe der vorliegenden Erfindung, eine Kennzeichnung für Zubehör und Hilfs- beziehungsweise Betriebsstoffe oder deren Aufbewahrungsgefäße sowie ein Identifikationssystem zu schaffen, die eine eindeutige Identifizierung einer Autorisierung durch den Hersteller eines technischen Geräts zulassen und die es gestatten, die Verbreitung von nichtautorisiertem Zubehör beziehungweise von nichtautorisierten Hilfs- oder Betriebsstoffen zu unterbinden.

Diese Aufgabe wird durch das im Anspruch 1 angegebene System gelöst.

Das Vorsehen der für das menschliche Auge erkennbaren und für einen menschlichen Betrachter unterscheidungskräftigen Information auf dem Zubehör beziehungsweise den Hilfs- oder Betriebsstoffen oder deren Aufbewahrungsgefäßen und der Lese- und Auswertevorrichtung für diese Information am technischen Gerät ermöglicht es, daß das technische Gerät vorzugsweise ebenfalls visuell überprüfen kann, ob die auf dem Datenträgerabschnitt vorgesehene Information mit einer im technischen Gerät gespeicherten vorgegebenen Information übereinstimmt, sodaß nur bei Übereinstimmung ein Betrieb eines technischen Geträts ermöglicht wird. Diese Authentifizierungsfunktion des erfindungsgemäßen Systems wird

ergänzt durch die Erkennbarkeit der Information für das menschliche Auge und durch deren für einen menschlichen Betrachter im allgemeinen unmittelbar, das heißt ohne längeres Betrachten, unterscheidungskräftige Eigenschaft. Somit kann der Benutzer zunächst mit den eigenen Augen überprüfen, ob es sich bei dem Zubehör beziehungsweise bei den Hilfs- oder Betriebsstoffen um vom Hersteller autorisierte Produkte handelt.

Insbesondere vorteilhaft ist es, wenn die für das menschliche Auge erkennbare und für den menschlichen Betrachter unterscheidungskräftige Information von einem Markenzeichen gebildet ist. Wird die Benutzung des technischen Geräts mit dem Zubehör beziehungsweise den Hilfs- oder Betriebsstoffen in diesem Fall nur dann freigegeben, wenn auf dem Datenträgerabschnitt das für das menschliche Auge erkennbare Markenzeichen, in der Regel eine registrierte und geschützte Marke des Herstellers, vorgesehen ist, so kann der Hersteller den Vertrieb von nichtautorisiertem Zubehör beziehungsweise nichtautorisierten Hilfs- oder Betriebsstoffen für das technische Gerät unmittelbar aufgrund einer Markenverletzung unterbinden, da ein nichtautorisierter Dritthersteller, um die Funktionsfähigkeit zu gewährleisten, das anderweitig geschützte Markenzeichen in unerlaubter Weise benutzen muß. Anstelle eines Markenzeichens kann auch ein anderweitig geschütztes graphisches oder schriftbildliches Element vorgesehen sein.

Weist der Datenträgerabschnitt einen ersten Bereich auf, in dem nur maschinenlesbare Information gespeichert ist und einen zweiten Bereich, in dem die für das menschliche Auge erkennbare und für den menschlichen Betrachter unterscheidungskräftige Information gespeichert ist, so lassen sich zusätzlich zu der für das menschliche Auge erkennbaren Information noch Daten auf dem

Datenträgerabschnitt unterbringen, die ebenfalls von der Lese- und Auswertevorrichtung des technischen Geräts gelesen und ausgewertet werden können, wobei diese Daten beispielsweise technische Daten des Produkts, also des entsprechenden Zubehörs oder des entsprechenden Hilfs- oder Betriebsstoffes, aufweisen. In diesem Fall kann der erste Bereich eine variable, produktabhängige Information enthalten, während der zweite Bereich eine statische, für alle Produkte gleiche, herstellerabhängige Information umfaßt.

Vorzugsweise ist auf dem Datenträgerabschnitt zumindest eine Referenzmarkierung für die Orientierung der Lesevorrichtung vorgesehen. Hierdurch wird eine sichere Erkennung der Daten auf dem Datenträgerabschnitt gewährleistet, auch wenn der Datenträgerabschnitt in unterschiedlichen Lagen an der Lesevorrichtung vorbeigeführt wird.

Weiter vorzugsweise ist die auf dem ersten Bereich des Datenträgerabschnitts gespeicherte Information von einem maschinenlesbaren Code gebildet und die auf dem zweiten Bereich des Datenträgerabschnitts gespeicherte Information ist von einem Markenzeichen gebildet.

In einer weiteren bevorzugten Ausführungsform weist der erste Bereich des Datenträgerabschnitts eine Vielzahl von Zeilen eines binären Pixelcodes auf, wobei der binäre Pixelcode eine Mehrzahl von Zeilen der nur maschinenlesbaren Information enthält, und der zweite Bereich des Datenträgerabschnitts weist eine Mehrzahl von Zeilen eines Pixelcodes auf, die gemeinsam die für das menschliche Auge erkennbare und für den menschlichen Betrachter unterscheidungskräftige Information bilden.

Durch den zeilenweisen binären Pixelcode im ersten Bereich wird eine Codierungsmöglichkeit geschaffen, die eine sehr hohe Datendichte pro Flächeneinheit des Datenträgerabschnitts gestattet.

Die Darstellung der für das menschliche Auge erkennbaren und für den menschlichen Betrachter unterscheidungskräftigen Information als zeilenweiser Pixelcode erleichtert die Auswertung der Information des Datenträgerabschnitts, die auf diese Weise mit ein und derselben Lese- und Auswertevorrichtung für den ersten Bereich und den zweiten Bereich erfolgen kann.

Bevorzugt ist zwischen dem ersten Bereich des Datenträgerabschnitts und dem zweiten Bereich des Datenträgerabschnitts eine maschinenlesbare Grenzmarkierung vorgesehen, die vorzugsweise aus zumindest einer Leerzeile besteht. Hierdurch wird sowohl für das menschliche Auge als auch für die Lesevorrichtung eine klare Abgrenzung des ersten und zweiten Bereichs geschaffen.

Außerdem wird bevorzugt, wenn die Referenzmarkierung einen zumindest einen der beiden Bereiche des Datenträgerabschnitts umgreifenden Rahmen aufweist.

Zur Erleichterung des Auslesens weist der binäre Pixelcode einer Zeile jeweils eine Reihe von nebeneinanderliegenden Bit-Markierungen der binären Darstellung einer Information auf.

Vorzugsweise sind zur Erhöhung der Auslesesicherheit in jeder Zeile zusätzlich binäre Bit-Markierungen für eine Prüfziffer für die binäre Darstellung der Information vorgesehen.

Ein Verfahren zur Erkennung und Decodierung von auf einem optisch lesbaren Datenträgerabschnitt eines Systems gemäß einem der Ansprüche 1 bis 10 vorgesehener Information, wobei die Information für das menschliche Auge erkennbar und für einen menschlichen Betrachter unterscheidungskräftig ist, umfaßt die Schritte: Erfassen der auf dem Datenträgerabschnitt vorhandenen optischen Information, Auslesen der auf den Datenträgerabschnitt vorhandenen optischen Information, Vergleichen der ausgelesenen Information mit einem gespeicherten Informationsmuster und Erzeugung eines Authentifizierungssignals, wenn die ausgelesene Information des zweiten Bereichs als mit dem gespeicherten Informationsmuster übereinstimmend erkannt worden ist.

Ein alternatives Verfahren zur Erkennung und Decodierung von auf einem optisch lesbaren Datenträgerabschnitt eines Systems gemäß einem der Ansprüche 1 bis 10 vorgesehener Information, wobei zumindest ein Teil der Information für das menschliche Auge erkennbar und für einen menschlichen Betrachter unterscheidungskräftig ist, umfaßt die Schritte: Erfassen der auf dem Datenträgerabschnitt vorhandenen optischen Information, vorzugsweise Identifizieren der Referenzmarkierung, Identifizieren des ersten und zweiten Bereichs des Datenträgerabschnitts, Auslesen und Decodieren der im ersten Bereich enthaltenen Binärinformation, Auslesen der im zweiten Bereich enthaltenen Information, Vergleichen der ausgelesenen Information des zweiten Bereichs mit einem gespeicherten Informationsmuster und Erzeugen eines Authenifizierungssignals, wenn die ausgelesene Information des zweiten Bereichs als mit dem gespeicherten Informationsmuster übereinstimmend erkannt worden ist.

Die Erfindung wird nachfolgend anhand eines Beispiels unter Bezugnahme auf die Zeichnungen näher erläutert; in dieser zeigt:

Fig. 1 den schematisch Aufbau eines erfindungsgemäßen Systems,

Fig. 2 einen Datenträgerabschnitt eines erfindungsgemäßen Systems und

Fig. 3 ein Blockschaltbild des erfindungsgemäßen Systems.

Fig. 1 ist eine schematische Darstellung eines technischen Geräts 10, das eine Aufnahme 12 für ein Hilfsstoff 14 enthaltendes Aufbewahrungsgefäß 16 aufweist. Beispielsweise handelt es sich bei dem technischen Gerät um ein Analysegerät für die automatische Analyse von chemischen oder biologischen Proben, wobei der Hilfsstoff von einem Reagenz gebildet ist, das zur Analyse einer bestimmten (nicht gezeigten) Probe im technischen Gerät 10 verwendet wird.

Das Aufbewahrungsgefäß 16 ist in seinem oberen Bereich mit einem Datenträgerabschnitt 18 versehen, der nachfolgend unter Bezugnahme auf Fig. 2 noch näher erläutert wird. Am technischen Gerät 10 ist eine Lese- und Auswertevorrichtung 20 vorgesehen, die beispielsweise eine Videokamera oder eine Still-Videokamera aufweist, deren Objektiv 22 auf den Datenträgerabschnitt 18 gerichtet ist.

In Fig. 2 ist der Datenträgerabschnitt 18 stark vergrößert wiedergegeben. Der Datenträgerabschnitt 18 weist einen ersten Bereich 24 auf, in dem eine maschinenlesbare Information gespeichert ist. Weiterhin weist der Datenträgerabschnitt 18 einen zweiten Bereich 26 auf, in dem eine für das menschliche Auge erkennbare und für den menschlichen Betrachter unterscheidungskräftige Information gespeichert ist. Im Beispiel der Fig. 2 ist das die Buchstabenfolge "SCIL".

Zwischen dem ersten und dem zweiten Bereich ist eine Leerzeile als Grenzmarkierung 28 vorgesehen, in der keine Binärinformation gespeichert ist. Der erste Bereich 24 und der zweite Bereich 26 sowie die Grenzmarkierung 28 sind gemeinsam von einem eine Referenzmarkierung 30 bildenden Rahmen umgeben.

Der erste Bereich 24 umfaßt eine Vielzahl von Zeilen, 32, 32', 32" eines binären Pixelcodes, der pro Zeile eine Vielzahl von Spalten 34, 34', 34" aufweist, wobei jede Kombination aus Zeile und Spalte einen Pixelort darstellt, der entweder durch ein weißes oder ein schwarzes Pixel eine binäre optische Information enthält. Am rechten Ende der Zeilen sind drei Spalten 36, 36', 36" vorgesehen, die jeweils in Verbindung mit einer Zeile einen binären Code einer Prüfziffer für die jeweilige Zeile enthalten.

Im vorliegenden Beispiel bezeichnet eine weiße Bit-Markierung 38 den Binärwert "0", wohingegen eine schwarze Bit-Markierung 40 den Binärwert "1" bezeichnet.

Im zweiten Bereich 26 sind die Buchstaben "SCIL" durch entsprechende zeilenweise Binärmarkierungen gebildet, wobei die Gesamtheit der Zeilen im zweiten Bereich 26 die für das menschliche Auge erkennbare und für einen menschlichen Betrachter unterscheidungskräftige Buchstabenkombination "SCIL" bilden. Anstelle von Buchstaben kann im zweiten Bereich genausogut eine graphische Darstellung, beispielsweise eine Logo, abgebildet sein.

Wird im Betrieb der Datenträgerabschnitt 18 von der Kamera der Lese- und Auswertevorrichtung 20 erfaßt, so wird zunächst anhand der Referenzmarkierung der die Information tragende Bereich des Datenträgerabschnitts identifiziert. Danach wird das von der Kamera erzeugte Bild zeilenweise analysiert, um

festzustellen, ob an einem entsprechenden Pixelort (Kombination aus Zeile und Spalte) eine helle oder dunkle oder farbige Bit-Markierung vorhanden ist, wobei unterschiedliche farbige Bit-Markierungen zur Erhöhung der Informationsdichte vorgesehen sein können. Die zeilenweise Codierung im ersten Bereich 24 wird entsprechend einem vorgegebenen Codierungsalgorythmus decodiert und der zweite Bereich 26 wird aufgrund der Grenzmarkierung 28 identifiziert. Die Abbildung des zweiten Bereichs 26 wird mit einer in einem Speicher des technischen Geräts 10 gespeicherten Abbildung verglichen, woraufhin, wenn der Vergleich eine Identität der gespeicherten Abbildung mit der erfaßten Abbildung des Datenträgers 18 ergibt, ein Authentifizierungssignal im technischen Gerät 10 erzeugt wird, das im vorliegenden Beispiel den Hilfsstoff 14 für die Durchführung einer Analyse zuläßt und damit die Analyse ermöglicht. Wird aufgrund einer fehlenden Übereinstimmung kein Authentifizierungssignal erzeugt, so wird eine Fehlermeldung am technischen Gerät 10 ausgegeben und dessen Betrieb für den Hilfsstoff 14 gesperrt.

In Fig. 3 ist ein Blockschaltbild dargestellt, das den prinzipiellen Aufbau des erfindungsgemäßen Systems zur Identifizierung und Authentifizierung zeigt. Das vom Objektiv 22 der Kamera 21 vom Datenträgerabschnitt 18 aufgenommene optische Signal wird in der Kamera 21 auf herkömmliche Weise in ein elektronisches Bildsignal verwandelt. Das elektronische Bildsignal wird in einer Ausleseeinrichtung 41 zum Beispiel zeilenweise ausgelesen und in einer nachgeordneten Decodiereinrichtung 42 unter Verwendung eines vorgegebenen Decodier-Algorythmus' decodiert. Die so erhaltene Information wird in eine Vergleichseinrichtung 43 weitergeleitet, in der diese vom Datenträgerabschnitt 18 ausgelesene Information mit einer in einer

Speichereinrichtung 44 gespeicherten Information verglichen wird.

Im Fall der Übereinstimmung der gelesenen Information mit der gespeicherten Information wird von der Vergleichseinrichtung 43 ein Freigabesignal an eine Freigabesteuerung 46 gesandt, welche daraufhin eine Funktionskomponente 48 des technischen Geräts 10 freigibt, so daß das technische Gerät 10 betriebsbereit ist.

Führt der Vergleich der gelesenen Information und der gespeicherten Information in der Vergleichseinrichtung 43 zu keiner Übereinstimmung der beiden Informationen, so wird ein Blockierungssignal von der Vergleichseinrichtung 43 an die Freigabesteuerung 46 gesandt, die daraufhin die Funktionskomponente 48 des technischen Geräts sperrt, so daß das technische Gerät nicht betriebsbereit ist, und ein optisches und/oder akustisches Signal wird ausgelöst, um das Bedienpersonal des technischen Geräts 10 auf die fehlende Betriebsbereitschaft des technischen Geräts hinzuweisen.

Die Funktionskomponente 48 kann beispielsweise eine Stromversorgung oder eine Steuerungs- und/oder Regeleinrichtung für das technische Gerät 10 oder für einen Teil des technischen Geräts 10 sein.

Die Erfindung ist nicht auf das obige Ausführungsbeispiel beschränkt, das lediglich der allgemeinen Erläuterung des Kerngedankens der Erfindung dient. Im Rahmen des Schutzumfangs kann die erfindungsgemäße Vorrichtung vielmehr auch andere als die oben beschriebenen Ausgestaltungsformen annehmen. Die Vorrichtung kann hierbei insbesondere Merkmale aufweisen, die eine Kombination aus den jeweiligen Einzelmerkmalen der Ansprüche darstellen.

So könnte auch beispielsweise eine Spiegelreflexkamera oder eine Vidoekamera mit einer erfindungsgemäßen Lese- und Auswertevorrichtung ausgestattet sein und die Wechselobjektive für diese Kamera könnten mit einem erfindungsgemäßen Datenträgerabschnitt versehen sein, um an dieser Kamera nur den Einsatz von Originalobjektiven des Kameraherstellers zu ermöglichen.

Bezugszeichen in den Ansprüchen, der Beschreibung und den Zeichnungen dienen lediglich dem besseren Verständnis der Erfindung und sollen den Schutzumfang nicht einschränken.

Ansprüche

1. System zur Identifizierung und Authentifizierung von Zubehör, Hilfsstoffen und/oder Betriebsstoffen für technische Geräte,
 - wobei das Zubehör beziehungsweise die Hilfs- oder Betriebsstoffe oder deren Aufbewahrungsgefäße (16) mit einem Datenträgerabschnitt (18) versehen sind, auf dem für das menschliche Auge erkennbare und für einen menschlichen Betrachter unterscheidungskräftige Information gespeichert ist,
 - wobei das technische Gerät (10) mit einer Lese- und Auswertevorrichtung (20) für diese Information versehen ist und
 - wobei die Lese- und Auswertevorrichtung (20) eine Vergleichseinrichtung (43) zum Vergleich der gelesenen Information mit einer gespeicherten Information sowie eine Freigabesteuerung (46) für zumindest eine Funktionskomponente (48) des technischen Geräts (10) dergestalt aufweist, daß bei einer Übereinstimmung der gelesenen Information mit der gespeicherten Information ein Authentifizierungssignal oder Freigabesignal von der Freigabesteuerung (46) an die Funktionskomponente (48) geliefert wird, die daraufhin den Betrieb des technischen Geräts (10) ermöglicht und die bei fehlender Übereinstimmung der gelesenen Information mit der gespeicherten Information den Betrieb des technischen Geräts sperrt.

2. System nach Anspruch 1,
dadurch g e k e n n z e i c h n e t ,
daß die für das menschliche Auge erkennbare und für den menschlichen Betrachter unterscheidungskräftige Information von einem Markenzeichen gebildet ist.

3. System nach Anspruch 1 oder 2,
dadurch g e k e n n z e i c h n e t ,
- daß der Datenträgerabschnitt (18) einen ersten Bereich (24) aufweist, in dem nur maschinenlesbare Information gespeichert ist, und
- daß der Datenträgerabschnitt (18) einen zweiten Bereich (26) aufweist, in dem die für das menschliche Auge erkennbare und für den menschlichen Betrachter unterscheidungskräftige Information gespeichert ist.

4. System nach einem der vorhergehenden Ansprüche,
dadurch g e k e n n z e i c h n e t ,
daß auf dem Datenträgerabschnitt (18) zumindest eine Referenzmarkierung (30) für die Orientierung der Lesevorrichtung (20) vorgesehen ist.

5. System nach einem der vorhergehenden Ansprüche,
dadurch g e k e n n z e i c h n e t ,
- daß die auf dem ersten Bereich (24) des Datenträgerabschnitts (18) gespeicherte Information von einem maschinenlesbaren Code gebildet ist und
- daß die auf dem zweiten Bereich (26) des Datenträgerabschnitts (18) gespeicherte Information von einem Markenzeichen gebildet ist.

6. System nach einem der vorhergehenden Ansprüche,
dadurch g e k e n n z e i c h n e t ,
- daß der erste Bereich (24) des Datenträgerabschnitts (18) eine Vielzahl von Zeilen (32, 32', 32") eines

binären Pixelcodes aufweist, wobei der binäre Pixelcode die nur maschinenlesbare Information enthält, und

- daß der zweite Bereich (26) des Datenträgerabschnitts (18) eine Mehrzahl von Zeilen eines Pixelcodes aufweist, die gemeinsam die für das menschliche Auge erkennbare und für den menschlichen Betrachter unterscheidungskräftige Information bilden.

7. System nach einem der vorhergehenden Ansprüche, dadurch g e k e n n z e i c h n e t , daß zwischen dem ersten Bereich (24) des Datenträgerabschnitts (18) und dem zweiten Bereich (26) des Datenträgerabschnitts (18) eine maschinenlesbare Grenzmarkierung (28) vorgesehen ist, die vorzugsweise aus zumindest einer Leerzeile besteht.

8. System nach einem der vorhergehenden Ansprüche, dadurch g e k e n n z e i c h n e t , daß die Referenzmarkierung (30) einen zumindest einen der beiden Bereiche (24, 26) des Datenträgerabschnitts (18) umgreifenden Rahmen aufweist.

9. System nach einem der vorhergehenden Ansprüche, dadurch g e k e n n z e i c h n e t , daß der binäre Pixelcode einer Zeile (32, 32', 32") jeweils eine Reihe von nebeneinanderliegenden Bit-Markierungen (34, 34', 34") der binären Darstellung einer Information aufweist.

10. System nach Anspruch 9, dadurch g e k e n n z e i c h n e t , daß in jeder Zeile (32, 32', 32") zusätzlich binäre Bit-Markierungen (36, 36', 36") für eine Prüfziffer für die binäre Darstellung der Information vorgesehen sind.

11. Verfahren zur Erkennung und Decodierung von auf einem optisch lesbaren Datenträgerabschnitt (18) eines Systems gemäß einem der Ansprüche 1 bis 10 vorgesehener Information, wobei die Information für das menschliche Auge erkennbar und für einen menschlichen Betrachter unterscheidungskräftig ist, mit den Schritten:
 - Erfassen der auf dem Datenträgerabschnitt vorhandenen optischen Information;
 - Auslesen der auf dem Datenträgerabschnitt vorhandenen optischen Information;
 - Vergleichen der ausgelesenen Information mit einem gespeicherten Informationsmuster und
 - Erzeugen eines Authentifizeriungssignals, wenn die ausgelesene Information des zweiten Bereichs (26) als mit dem gespeicherten Informationsmuster übereinstimmend erkannt worden ist.

12. Verfahren zur Erkennung und Decodierung von auf einem optisch lesbaren Datenträgerabschnitt (18) eines Systems gemäß einem der Ansprüche 1 bis 10 vorgesehener Information, wobei zumindest ein Teil der Information für das menschliche Auge erkennbar und für einen menschlichen Betrachter unterscheidungskräftig ist, mit den Schritten:
 - Erfassen der auf dem Datenträgerabschnitt (18) vorhandenen optischen Information;
 - Identifizieren des ersten und zweiten Bereichs (24, 26) des Datenträgerabschnitts (18);
 - Auslesen und Decodieren der im ersten Bereich (24) enthaltenen Binärinformation;
 - Auslesen der im zweiten Bereich (26) enthaltenen Information;
 - Vergleichen der ausgelesenen Information des zweiten Bereichs (26) mit einem gespeicherten Informationsmuster und

- Erzeugen eines Authentifizierungssignals, wenn die ausgelesene Information des zweiten Bereichs (26) als mit dem gespeicherten Informationsmuster übereinstimmend erkannt worden ist.

Fig. 1

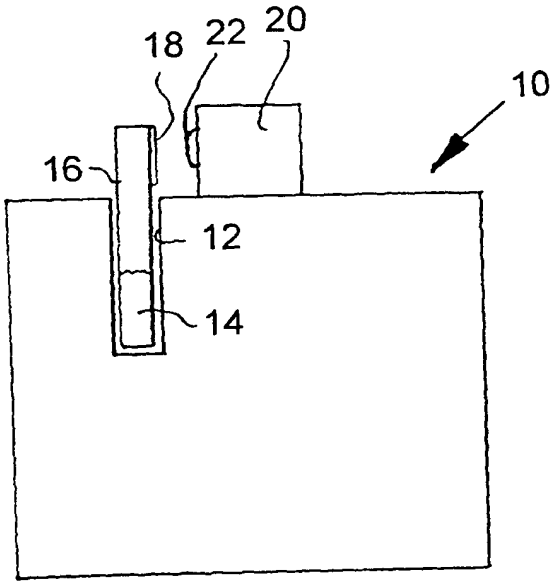

18
22
20
10
16
12
14

Fig. 2


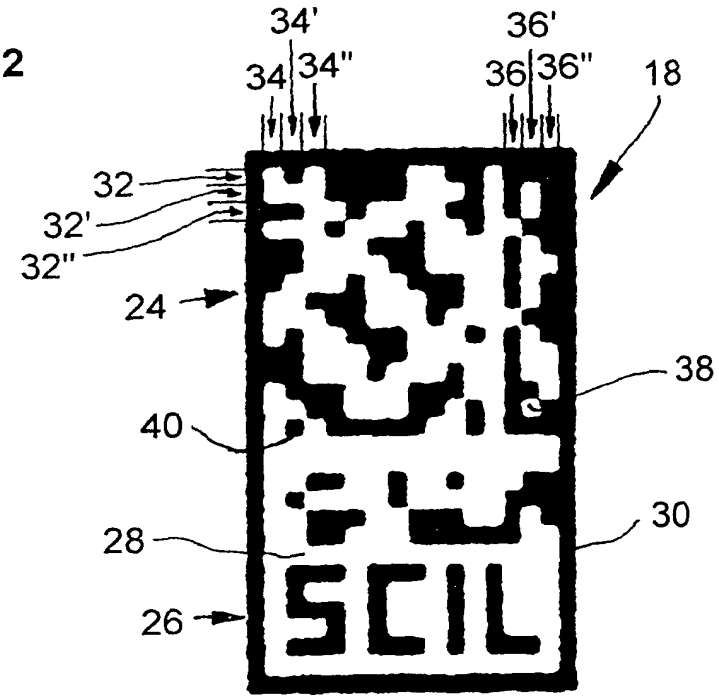

34'
36'
34
34"
36
36"
18
32
32'
32"
24
38
40
28
30
26
SCIL

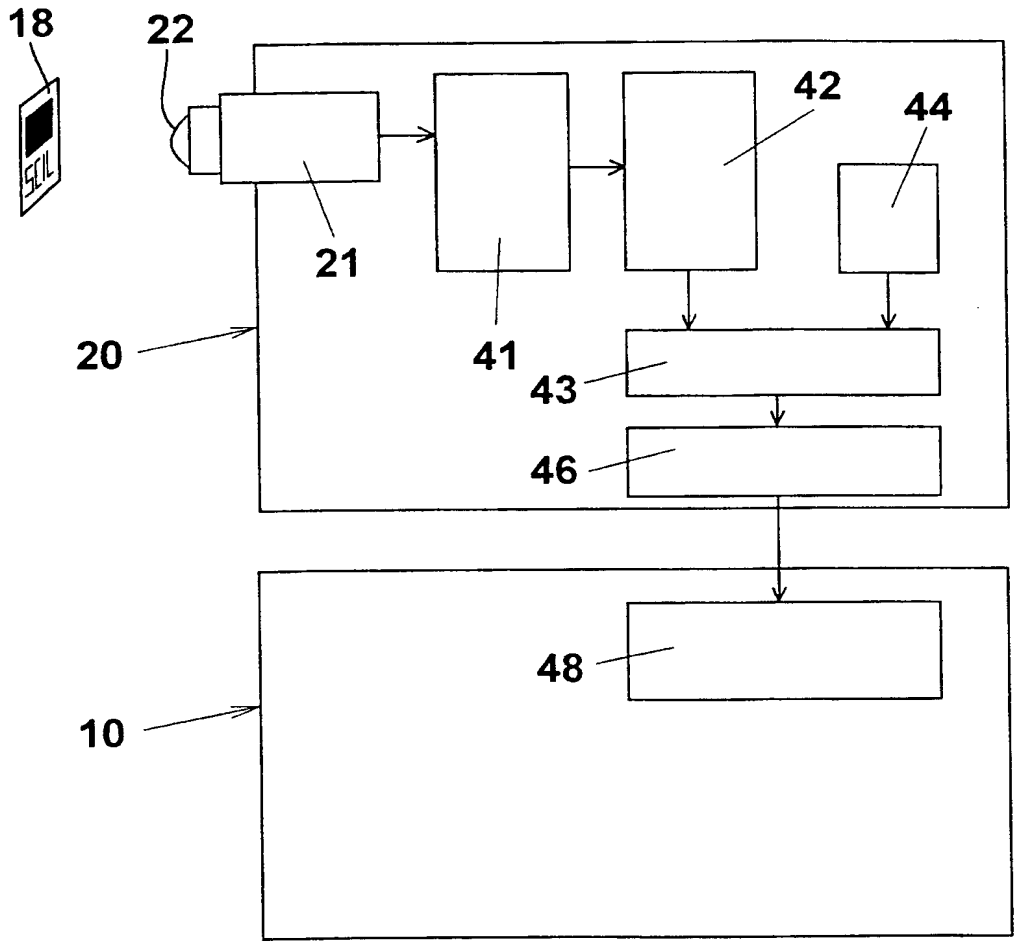Fig. 3



INTERNATIONAL SEARCH REPORT

nternational Application No
PCT/EP 99/01091

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G07F7/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 G07F B07C G06K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 11790 A (UNITED PARCEL SERVICE INC) 3 April 1997 (1997-04-03)	1-9,11, 12
Y	abstract page 1, line 30 - page 4, line 10 figure 2	10

Y	EP 0 733 991 A (SYMBOL TECHNOLOGIES INC) 25 September 1996 (1996-09-25)	10
A	page 5, line 3 - line 10 figure 3	9

A	US 5 361 913 A (MELCHIONNA CARMINE M) 8 November 1994 (1994-11-08)	1,4,11, 12
	abstract column 2, line 58 - column 5, line 63	

	-/--	

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
4 August 1999	11/08/1999

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Jacobs, P

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

nternational Application No
PCT/EP 99/01091

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
A	DE 32 05 420 A (METALLGESELLSCHAFT AG) 25 August 1983 (1983-08-25) abstract page 5, paragraphs 1,2	1-5,7, 11,12

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/EP 99/01091

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9711790 A	03-04-1997	US 5770841 A	23-06-1998
		CA 2231450 A	03-04-1997
		EP 0852520 A	15-07-1998
EP 0733991 A	25-09-1996	US 5304786 A	19-04-1994
		AU 637409 B	27-05-1993
		AU 6392390 A	09-10-1990
		CA 2026387 A	06-07-1991
		DE 69027762 D	14-08-1996
		DE 69027762 T	09-01-1997
		DE 69033063 D	20-05-1999
		EP 0439682 A	07-08-1991
		EP 0565738 A	20-10-1993
		JP 2846442 B	13-01-1999
		JP 3204793 A	06-09-1991
		US 5506697 A	09-04-1996
		US 5399846 A	21-03-1995
		US 5471533 A	28-11-1995
		US 5489158 A	06-02-1996
		US 5635697 A	03-06-1997
		US 5504322 A	02-04-1996
		US 5644408 A	01-07-1997
		US 5710419 A	20-01-1998
		US 5796090 A	18-08-1998
		US 5760382 A	02-06-1998
		US 5837986 A	17-11-1998
		US 5243655 A	07-09-1993
		US 5337361 A	09-08-1994
		US 5880453 A	09-03-1999
US 5361913 A	08-11-1994	NONE	
DE 3205420 A	25-08-1983	NONE	

INTERNATIONALER RECHERCHENBERICHT

Internationales Aktenzeichen
PCT/EP 99/01091

A. KLASSIFIZIERUNG DES ANMELDUNGSGEGENSTANDES
IPK 6 G07F7/06

Nach der Internationalen Patentklassifikation (IPK) oder nach der nationalen Klassifikation und der IPK

B. RECHERCHIERTE GEBIETE

Recherchierter Mindestprüfstoff (Klassifikationssystem und Klassifikationssymbole)
IPK 6 G07F B07C G06K

Recherchierte aber nicht zum Mindestprüfstoff gehörende Veröffentlichungen, soweit diese unter die recherchierten Gebiete fallen

Während der internationalen Recherche konsultierte elektronische Datenbank (Name der Datenbank und evtl. verwendete Suchbegriffe)

C. ALS WESENTLICH ANGESEHENE UNTERLAGEN

Kategorie*	Bezeichnung der Veröffentlichung, soweit erforderlich unter Angabe der in Betracht kommenden Teile	Betr. Anspruch Nr.
X Y	WO 97 11790 A (UNITED PARCEL SERVICE INC) 3. April 1997 (1997-04-03) Zusammenfassung Seite 1, Zeile 30 - Seite 4, Zeile 10 Abbildung 2 ---	1-9,11, 12 10
Y A	EP 0 733 991 A (SYMBOL TECHNOLOGIES INC) 25. September 1996 (1996-09-25) Seite 5, Zeile 3 - Zeile 10 Abbildung 3 ---	10 9
A	US 5 361 913 A (MELCHIONNA CARMINE M) 8. November 1994 (1994-11-08) Zusammenfassung Spalte 2, Zeile 58 - Spalte 5, Zeile 63 --- -/--	1,4,11, 12

[X] Weitere Veröffentlichungen sind der Fortsetzung von Feld C zu entnehmen

[X] Siehe Anhang Patentfamilie

* Besondere Kategorien von angegebenen Veröffentlichungen

"A" Veröffentlichung, die den allgemeinen Stand der Technik definiert, aber nicht als besonders bedeutsam anzusehen ist

"E" älteres Dokument, das jedoch erst am oder nach dem internationalen Anmeldedatum veröffentlicht worden ist

"L" Veröffentlichung, die geeignet ist, einen Prioritätsanspruch zweifelhaft erscheinen zu lassen, oder durch die das Veröffentlichungsdatum einer anderen im Recherchenbericht genannten Veröffentlichung belegt werden soll oder die aus einem anderen besonderen Grund angegeben ist (wie ausgeführt)

"O" Veröffentlichung, die sich auf eine mündliche Offenbarung, eine Benutzung, eine Ausstellung oder andere Maßnahmen bezieht

"P" Veröffentlichung, die vor dem internationalen Anmeldedatum, aber nach dem beanspruchten Prioritätsdatum veröffentlicht worden ist

"T" Spätere Veröffentlichung, die nach dem internationalen Anmeldedatum oder dem Prioritätsdatum veröffentlicht worden ist und mit der Anmeldung nicht kollidiert, sondern nur zum Verständnis des der Erfindung zugrundeliegenden Prinzips oder der ihr zugrundeliegenden Theorie angegeben ist

"X" Veröffentlichung von besonderer Bedeutung; die beanspruchte Erfindung kann allein aufgrund dieser Veröffentlichung nicht als neu oder auf erfinderischer Tätigkeit beruhend betrachtet werden

"Y" Veröffentlichung von besonderer Bedeutung; die beanspruchte Erfindung kann nicht als auf erfinderischer Tätigkeit beruhend betrachtet werden, wenn die Veröffentlichung mit einer oder mehreren anderen Veröffentlichungen dieser Kategorie in Verbindung gebracht wird und diese Verbindung für einen Fachmann naheliegend ist

"&" Veröffentlichung, die Mitglied derselben Patentfamilie ist

Datum des Abschlusses der internationalen Recherche	Absendedatum des internationalen Recherchenberichts
4. August 1999	11/08/1999

Name und Postanschrift der Internationalen Recherchenbehörde	Bevollmächtigter Bediensteter
Europäisches Patentamt, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Jacobs, P

Formblatt PCT/ISA/210 (Blatt 2) (Juli 1992)

INTERNATIONALER RECHERCHENBERICHT

Internationales Aktenzeichen
PCT/EP 99/01091

C.(Fortsetzung) ALS WESENTLICH ANGESEHENE UNTERLAGEN

Kategorie*	Bezeichnung der Veröffentlichung, soweit erforderlich unter Angabe der in Betracht kommenden Teile	Betr. Anspruch Nr.
A	DE 32 05 420 A (METALLGESELLSCHAFT AG) 25. August 1983 (1983-08-25) Zusammenfassung Seite 5, Absätze 1,2	1-5,7, 11,12

Formblatt PCT/ISA/210 (Fortsetzung von Blatt 2) (Juli 1992)

INTERNATIONALER RECHERCHENBERICHT

Angaben zu Veröffentlichungen, die zur selben Patentfamilie gehören

Internationales Aktenzeichen
PCT/EP 99/01091

Im Recherchenbericht angeführtes Patentdokument	Datum der Veröffentlichung	Mitglied(er) der Patentfamilie	Datum der Veröffentlichung
WO 9711790 A	03-04-1997	US 5770841 A	23-06-1998
		CA 2231450 A	03-04-1997
		EP 0852520 A	15-07-1998
EP 0733991 A	25-09-1996	US 5304786 A	19-04-1994
		AU 637409 B	27-05-1993
		AU 6392390 A	09-10-1990
		CA 2026387 A	06-07-1991
		DE 69027762 D	14-08-1996
		DE 69027762 T	09-01-1997
		DE 69033063 D	20-05-1999
		EP 0439682 A	07-08-1991
		EP 0565738 A	20-10-1993
		JP 2846442 B	13-01-1999
		JP 3204793 A	06-09-1991
		US 5506697 A	09-04-1996
		US 5399846 A	21-03-1995
		US 5471533 A	28-11-1995
		US 5489158 A	06-02-1996
		US 5635697 A	03-06-1997
		US 5504322 A	02-04-1996
		US 5644408 A	01-07-1997
		US 5710419 A	20-01-1998
		US 5796090 A	18-08-1998
		US 5760382 A	02-06-1998
		US 5837986 A	17-11-1998
		US 5243655 A	07-09-1993
		US 5337361 A	09-08-1994
		US 5880453 A	09-03-1999
US 5361913 A	08-11-1994	KEINE	
DE 3205420 A	25-08-1983	KEINE	